

More Titlepage Styles with Package `uni-titlepage`

Markus Kohm

v1.1a 2022/09/06

Abstract

Creation of title pages is something most authors should not have to do. But reality is not perfect, so a lot of authors have to do it. In 2009 KOMA started the title page project at <https://komascript.de/titlepage> to collect real title pages and implement them with a well defined interface. In 2021 the project has been moved to <https://github.com/komascript/uni-titlepage> and renamed.

Now, changing from one title page style to another would be very simple. Nevertheless implementation of a new title page style may be still difficult. But maybe the guys of the title page project would help you. Just ask!

Contents

1	Loading the Package	2
2	The Title Page Styles and their Options	2
2.1	Style DHBW	6
2.2	Style KOMAScript	7
2.3	Style Markus-1	9
2.4	Style Markus-2	11
2.5	Style Spacer	13
2.6	Style TU-DD	15
2.7	Style TU-HH	16
2.8	Style KIT	17
2.9	Style JT-Aufsaetze	18
2.10	Style JT-Geschichte	19
2.11	Style JT-Typography	20
2.12	Style WWUM	21
2.13	Style UKoLa	22
3	Additonal Commands	23
4	Implementation	24
4.1	The Installation Driver ‘ <code>uni-titlepage.ins</code> ’	24
4.2	The Package <code>scrbase</code>	26
4.3	The <code>titlepage</code> Drivers	38
4.4	The Examples and the Manual	57

1 Loading the Package

You may load this package like all the other package, simply using:

```
\usepackage{uni-titlepage}
```

This package declares several options for title page manipulation. We will describe all those options in the following. Most of the options are package options as well, but some are style options only. You may use every package option already as optional argument of `\usepackage` and even of `\documentclass`. But in most cases it would be better to use them as optional argument of `\TitlePageStyle` or `\maketitle`. We show this way below.

2 The Title Page Styles and their Options

TitlePageStyle Several title page styles are supported. You may select a title page style using:

```
\TitlePageStyle[<option>=<value>,...]{<style>}.
```

The available styles are shown at the following sub-sections. Options may be every package option and every style option.

maketitle After loading a style you may generate title pages using:

```
\maketitle[<option>=<value>,...].
```

Again, you may use every package option and every style option as optional argument.

TitleOption Another way to set an option is to use either

TitleOptions

```
\TitleOption{<option>}{<value>}
```

or

```
\TitleOptions{<option>=<value>,...}.
```

You can set every package option an every option of already loaded title page styles.

For every main option, that expects a string argument exists a corresponding command with the same name. So you may set, e.g., the title either using `\TitleOptions{title={This is the Title}}` or `\TitleOption{title}{This is the Title}` or `\maketitle[title={This is the Title}]` or `\TitlePageStyle[title={This is the Title}]{...}` or `\title{This is the Title}`. The most robust way is to use the command `\title` instead of the option at one of the other commands. If you use the option you may need to add `\protect` in front of some commands inside the option value. But note: This is not valid for alias options like `student`, because alias options do not have a corresponding command!

<i>String Option</i>	<i>Styles</i>	<i>Common Meaning</i>
advisor	TU-DD, UKoLa	if your personal advisor differs from the advising professor, this is the name of the advisor
author	<i>every style</i>	the authors, with some styles (currently not with DHBW or UKoLa) you may separate multiple authors by \and
chair	TU-DD, KIT, WWUM, UKoLa	the chair or institute of the faculty of the university where you've made or presented your work
company	DHBW	some works are made not only at a university but in cooperation with a company; at Duale Hochschule Baden-Württemberg this is the default case
course	DHBW	the shortcut for your discipline or course
date	DHBW, KIT, KOMAScript, Markus-1, Markus-2, Spacer, TU-HH, TU-DD, JT-Typography, WWUM	the documents main date, this may be, e.g., the release date, the semester of a thesis or any other most valid date
dedication	KOMAScript, Markus-1, Markus-2, Spacer	sometimes it is nice to dedicate the work to someone, e.g., your wife, your children, your grandmother or your first love
academicgrade	DHBW, TU-HH, WUMM, UKoLa	the academic grade or degree you reach with the work
discipline	DHBW, TU-DD, WUMM	the discipline in which you've made your work or reach your academic grade
duration	DHBW	the processing time for your work
faculty	TU-DD, KIT, WUMM	the faculty of the university where you've made or presented your work
homepage	KIT	the www-address of the homepage

...

<i>String Option</i>	<i>Styles</i>	<i>Common Meaning</i>
<code>mainlogo</code>	DHBW, KIT, UKoLa	a logo at the main title (currently used for the DHBW or the KIT logo at the default of <code>titlehead</code> and the main logo of style UKoLa)
<code>secondlogo</code>	UKoLa	a secondary logo
<code>matriculationnumber</code>	DHBW, TU-DD	if you were a student while you've made the work, this is your number
<code>oralexaminationdate</code>	TU-HH, WUMM	sometimes the date of the oral examination is not the main date but has to be shown too
<code>place</code>	DHBW, TU-HH, JT-Geschichte, JT-Typography, WUMM, UKoLa	the place, in general the city, where you've made the work or where the Duale Hochschule or the publisher resides
<code>professor</code>	TU-DD, WUMM	the name of the professor who advised you during your work
<code>publisher</code>	KOMAScript, Markus-1, Markus-2, Spacer, JT-Aufsätze, JT-Geschichte, JT-Typography	most written works have a publisher
<code>referee</code>	DHBW, TU-HH, UKoLa	every academic work will be referred; with some styles (currently TU-HH, WWUM, UKoLa) multiple referees may be separated with <code>\and</code>
<code>science</code>	WWUM	kind of science, e. g., "Naturwissenschaften"
<code>student</code>	<i>see <code>author</code></i>	alias option to <code>author</code>
<code>subject</code>	<i>every style</i>	the kind of work, there are special predefined subjects; if you use one of <code>bachelor</code> , <code>academicgrade</code> , <code>diploma</code> , <code>master</code> , <code>project</code> , <code>seminar</code> , or <code>studentresearch</code> a language dependend replacement will be done; to avoid this, you may set the value in parenthesis

...

<i>String Option</i>	<i>Styles</i>	<i>Common Meaning</i>
subtitle	KOMAScript, Markus-1, Markus-2, Spacer, TU-HH	the sub-title of the document
title	<i>every style</i>	the main title of the document
titlehead	DHBW, KOMAScript, Markus-2, Spacer, KIT	page head over the main title of the document
university	DHBW, TU-DD, TU-HH, KIT, WWUM	the university where you've made or presented your work

Note: Depending on the used style some elements are mandatory. You will get an error message like

```
Package uni-titlepage Error: empty title element 'author'.
```

if such a mandatory element has not been set. In this case use either the option or the corresponding command to setup at least a dummy value, e.g.

```
\author{DON'T FORGET TO CHANGE THE AUTHOR}
```

before the corresponding `\maketitle`.

Let's have a look at the already defined title page styles. You should find an example L^AT_EX file for each of them at the documentation folder. If not, ask your distributor or administrator for those! But you may find the code of all examples in [docstrip](#) syntax even at [subsection 4.4](#) starting at [page 57](#). At the shown examples most variable contents have been made red.

2.1 Style DHBW

Josef Schmidbauer asked me for a title page usable for bachelor thesis at the “Duale Hochschulen Baden-Württemberg”. This is a only one title page style.

The page (in example `titlepage-DHBW.tex`) is:

1. main title page with `titlehead`,
`mainlogo`, `title`, `subject`,
`academicgrade`, `discipline`,
`place`, `author`, `duration`,
`matriculationnumber`, `course`,
`company`, `referee`, `university`, and
`date`.



Note: The upper right corner is the logo placeholder. If you'd download the logo from the DHBW homepage <http://www.dhbw.de> and save it with the name `DHBW_d_MOS_195x95_rgb_300.jpg` it would be used automatically. The logo file is also available from https://de.wikipedia.org/wiki/Datei:DHBW_d_MOS_195x95_rgb_300.jpg. This original logo has a large white border, so it would be much smaller than the red box at the example. The example file also contains comments for an optional company logo at the upper left corner.

2.2 Style KOMAScript

This is a style similar to the title pages of KOMA-Script classes.

The pages (in twoside example `titlepage-KOMAScript.tex`) are:

1. defined by `extratitle`, which is not a package option but a style option. You may set it using `\TitleOption` or `\TitleOptions` after loading the style or with the optional argument of `\maketitle` or `\TitlePageStyle`.
2. empty and only in twoside mode with `extratitle` used.
3. main title page with `titlehead`, `subject`, `title`, `subtitle`, `author`, `date`, `publisher`. You may use `\thanks` at any of these.

Das ist ein Schmutztitel im Stil KOMAScript

Den Kopfbereich kann man auf diese Weise füllen.

Eine Klassifizierung der Arbeit

Titel im Stil KOMAScript
Untertitel

Einen Verlag kann man ebenfalls angeben

<p>Oberer Bereich der Rückseite des Haupttitels im Stil KOMAScript.</p> <p>Unterer Bereich der Rückseite des Haupttitels im Stil KOMAScript.</p>	<p>Eine Widmung im Stil KOMAScript</p>
	<ol style="list-style-type: none"> 4. only in twoside mode defined by <code>uppertitleback</code> and <code>lowertitleback</code>, which are not package options but style options. You may set them using <code>\TitleOption</code> or <code>\TitleOptions</code> after loading the style or with the optional argument of <code>\maketitle</code> or <code>\TitlePageStyle</code>. 5. optional post title with <code>dedication</code>. 6. empty and only in twoside mode with <code>dedication</code> used.

2.3 Style Markus-1

This is a style similar to the one of the title of the KOMA-Script book.

The pages (in twoside example `titlepage-Markus-1.tex`) are:

1. defined by `publisher`; may be omitted by `publisher={}`.
2. only in twoside mode with `publisher` defined by `author`.
3. main title page with `subject`, `title`, `subtitle`, and `date`.

	Verlag
Markus Kohn Sonst Jemand	Eine Klassifizierung der Arbeit Titel im Stil Markus-1 Untertitel

<p>Oberer Bereich der Rückseite des Haupttitels im Stil <code>Markus-1</code>.</p> <p>Unterer Bereich der Rückseite des Haupttitels im Stil <code>Markus-1</code>.</p>	<p>Eine Widmung im Stil <code>Markus-1</code></p>
	<ol style="list-style-type: none"> 4. only in twoside mode defined by <code>uppertitleback</code> and <code>lowertitleback</code>, which are not package options but style options. You may set them using <code>\TitleOption</code> or <code>\TitleOptions</code> after loading the style or with the optional argument of <code>\maketitle</code> or <code>\TitlePageStyle</code>. 5. optional post title with <code>dedication</code>. 6. empty and only in twoside mode with <code>dedication</code> used.

2.4 Style Markus-2

This style is not a real live style, but similar styles are often used:

The pages (in twoside example `titlepage-Markus-2.tex`) are:

1. defined by `extratitle`.
2. empty and only in twoside mode with `extratitle` used.
3. main title page with `titlehead` placed at the page head (if this is to high, it might be put outside the page; if it is to deep, it might overwrite parte of the title), `rulewidth`, `rulesep` and `rulecolor` for the vertical rule (these aren't package options but style options), `subject`, `title`, `subtitle`, `author`, `date`, and `publisher`. Note: If you want to use option `rulecolor` you have to load a package, that defines `\color`, e.g., `color` or `xcolor`. Otherwise the color will be ignored.

Das ist ein Schmutztitel im Stil Markus-2

Eine Klassifizierung der Arbeit
Markus Kohn
Titel im Stil Markus-2
Untertitel

Verlag

<p>Oberer Bereich der Rückseite des Haupttitels im Stil <code>Markus-2</code>.</p> <p>Unterer Bereich der Rückseite des Haupttitels im Stil <code>Markus-2</code>.</p>	<p>Eine Widmung im Stil <code>Markus-2</code>.</p>
	<ol style="list-style-type: none"> 4. only in twoside mode defined by <code>uppertitleback</code> and <code>lowertitleback</code>, which are not package options but style options. You may set them using <code>\TitleOption</code> or <code>\TitleOptions</code> after loading the style or with the optional argument of <code>\maketitle</code> or <code>\TitlePageStyle</code>. 5. optional post title with <code>dedication</code>. 6. empty and only in twoside mode with <code>dedication</code> used.

2.5 Style Spacer

This style is a variant of style Markus-2 from [subsection 2.4](#). It was asked by spacer2012 at the original `titlepage` project on <https://komascript.de/titlepage>. In difference to Markus-2 the title head will not be placed at the page head but at the body.

The pages (in `twoside` example `titlepage-Spacer.tex`) are:

1. defined by `extratitle`.
2. empty and only in `twoside` mode with `extratitle` used.
3. main title page with `titlehead` placed at the page head, `rulewidth`, `rulesep` and `rulecolor` for the vertical rule (these aren't package options but style options), `subject`, `title`, `subtitle`, `author`, `date`, and `publisher`. Note: If you want to use option `rulecolor` you have to load a package, that defines `\color`, e.g., `color` or `xcolor`. Otherwise the color will be ignored.

Das ist ein Schmutztitel im Stil Spacer



Eine Klassifizierung der Arbeit

Markus Kohm

Titel im Stil Spacer

Untertitel

Verlag

<p>Oberer Bereich der Rückseite des Haupttitels im Stil Spacer.</p> <p>Unterer Bereich der Rückseite des Haupttitels im Stil Spacer.</p>	<p>Eine Widmung im Stil Spacer</p>
	<ol style="list-style-type: none"> 4. only in twoside mode defined by <code>uppertitleback</code> and <code>lowertitleback</code>, which are not package options but style options. You may set them using <code>\TitleOption</code> or <code>\TitleOptions</code> after loading the style or with the optional argument of <code>\maketitle</code> or <code>\TitlePageStyle</code>. 5. optional post title with <code>dedication</code>. 6. empty and only in twoside mode with <code>dedication</code> used.

2.6 Style TU-DD

This style is used at the “Technische Universität Dresden”. I was asked for this several years ago. Only one title page is defined!

The page (in example `titlepage-TU-DD.tex`) is:

1. main title page with `university`, `faculty`, `chair`, `professor`, `title`, `subject`, `author`, `discipline`, `matriculationnumber`, `advisor`, `place`, and `date`.

Technische Universität Dresden
Fakultät Wirtschaftswissenschaften
SAP-Stiftungslehrstuhl für
Entrepreneurship und Innovation
Prof. Dr. Michael Schefczyk

Titel im Stil TU-DD
Seminararbeit
(bzw. Diplomarbeit)

eingereicht von
Vorname und Name
Studienrichtung
Matrikel-Nr.

Betreuer:
(mit akadem. Grad, Vor- und Zuname)

Dresden, den (Datum der Abgabe)

But there is another variant. If option `blackborder` was set to true, an black border is put around the page:

The page (in example `titlepage-TU-DD.tex` with option `blackborder`) is:

1. main title page with `university`, `faculty`, `chair`, `professor`, `title`, `subject`, `author`, `discipline`, `matriculationnumber`, `advisor`, `place`, and `date`.

Technische Universität Dresden
Fakultät Wirtschaftswissenschaften
SAP-Stiftungslehrstuhl für
Entrepreneurship und Innovation
Prof. Dr. Michael Schefczyk

Titel im Stil TU-DD
Seminararbeit
(bzw. Diplomarbeit)

eingereicht von
Vorname und Name
Studienrichtung
Matrikel-Nr.

Betreuer:
(mit akadem. Grad, Vor- und Zuname)



Dresden, den (Datum der Abgabe)

2.7 Style TU-HH

This style is used at the “Technische Universität Hamburg-Harburg”. I was asked for this several years ago. Only two title pages are defined!

The pages (in twoside example `titlepage-TU-HH.tex`) are:

1. main title page with `title`, `subtitle`, `university`, `academicgrade`, `subject`, `author`, `place`, and `date`. Some additional text depending on the selected language will be used also.

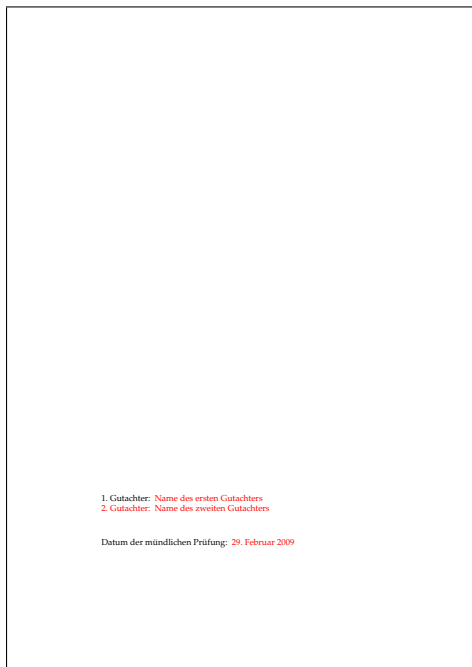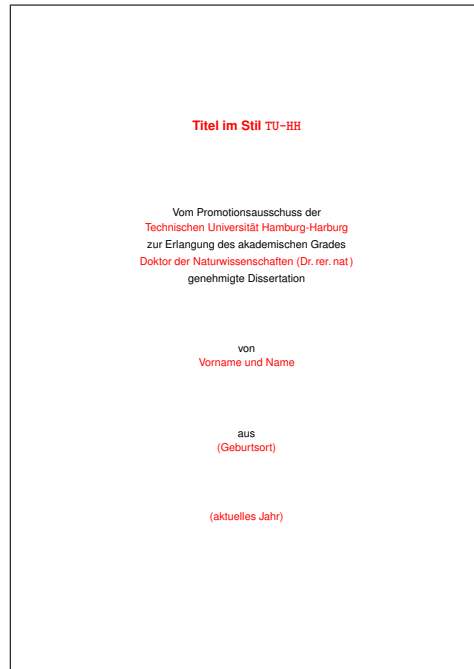

2. only in twoside mode with `referee` and `oralexaminationdate`.

The output of style TU-HH differs, if you use option `final`, which is a style option, not a package option. You may set it using `\TitleOption` or `\TitleOptions` after loading the style or with the optional argument of `\maketitle` or `\TitlePageStyle`.


2.8 Style KIT

This style is used at the “KIT – University of the State of Baden-Württemberg and National Research Center of the Helmholtz Association”. I’ve made this because of the ugly L^AT_EX class and template made by the KIT itself. Only one title page is defined!

The page (in example `titlepage-KIT.tex`) is:

1. main title page with `titlehead`, `mainlogo`, `title`, `subject`, `author`, `referee`, `advisor`, `university`, `duration`, and `homepage`. Some additional text depending on the selected language will be used also.

If `titlehead` is empty or unused left aligned `mainlogo` will be used. If `mainlogo` is empty or unused, and if you have a logo file `KITLogo_RGB.pdf`, this will be used. As an alternative also `2560px-Logo_KIT.svg.png`, `2000px-Logo_KIT.svg.png`, `1280px-Logo_KIT.svg.png`, `1024px-Logo_KIT.svg.png`, `1000px-Logo_KIT.svg.png`, `800px-Logo_KIT.svg.png`, `640px-Logo_KIT.svg.png`, or `500px-Logo_KIT.svg.png` from https://de.wikipedia.org/wiki/Datei:Logo_KIT.svg would be auto-detected. Several other elements will be set to defaults too, if they are empty. So you don’t need to set all the elements, that has been set at the example file.

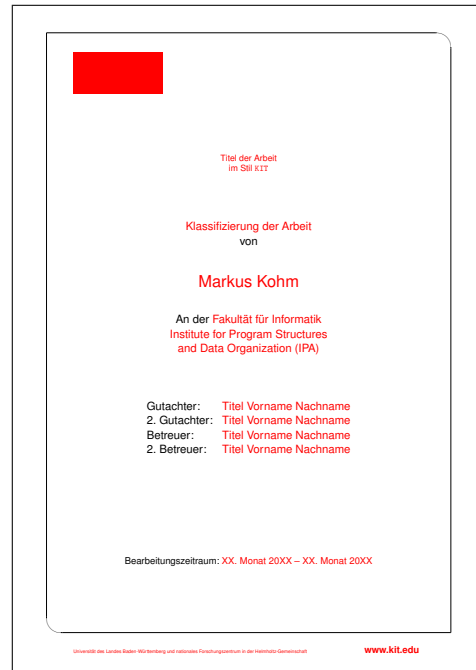


2.9 Style JT-Aufsätze

The style is based on the front cover of “Jan Tschichold: Ausgewählte Aufsätze über Fragen der Gestalt des Buches und der Typographie, Birkhäuser Verlag Basel, 1975, ISBN: 3-7643-1946-1”. I’ve made this, because the book is a major book of classic typography. It seems to be old fashioned and indeed it is. Note, that the front cover of a book and the main title of a book are not the same! Nevertheless, here I’ve made a main title from a front cover. Currently only one title page is defined, but you may also use `extratitle`, `uppertitleback`, and `lowertitleback`.

The page (in example `titlepage-JT-Aufsätze.tex`) is:

1. main title page with `author`, `title`, `publisher`, `rulewidth`, `rulesep` for width of the horizontal rules and the distance between them and `rulecolor` for the color of the rules (these aren’t package options but style options). Note: If you want to use option `rulecolor` you have to load a package, that defines `\color`, e.g., `color` or `xcolor`. Otherwise the color will be ignored.

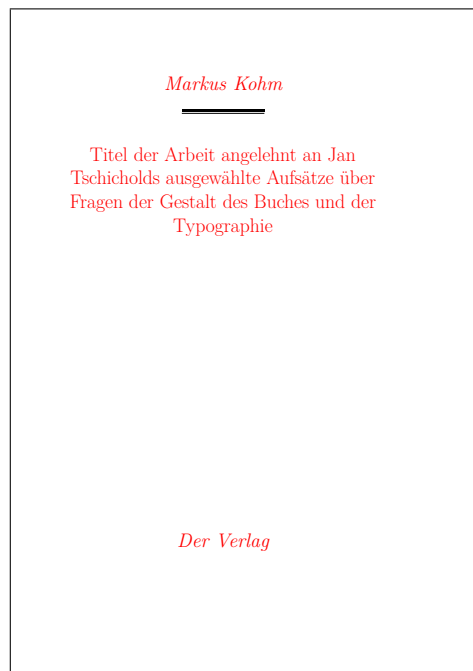


2.10 Style JT-Geschichte

The style is based on “Jan Tschichold: Geschichte der Schrift in Bildern; Holbein-Verlag, 1947”. This is another major book of classic typography. I seems to be old fashioned and indeed it is. Currently only one title page is defined, but you may also use `extratitle`, `uppertitleback`, and `lowertitleback`.

The page (in example `titlepage-JT-Geschichte.tex`) is:

1. main title page with `author`, `title`, `publisher`, `place`, `rulewidth` and `rulesep` for width of the horizontal rules and the distance between them and `rulecolor` for the color of them (these aren't package options but style options). Note: If you want to use option `rulecolor` you have to load a package, that defines `\color`, e.g., `color` or `xcolor`. Otherwise the color will be ignored.

Note, that the default for `titlepagefont` prints everything but the `title` with ad-hoc letterspacing in upper-case letters if `\lsstyle` is available and without letterspacing but in small capitals otherwise. Changing the default of `titlepagefont` will also change this automatism.

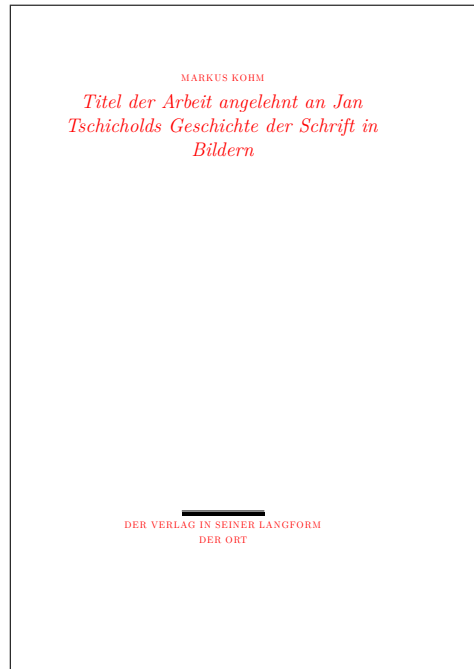

2.11 Style JT-Typography

The style is based on “Jan Tschichold: The New Typography; University of California Press, Berkley and Los Angeles, California 1995”. This is the English translation of another major book of classic typography. Some things like missing letterspacing at the upper-case title seems to be wrong. Currently only one title page is defined, but you may also use `extratitle`, `uppertitleback`, and `lowertitleback`.

The page (in example `titlepage-JT-Geschichte.tex`) is:

1. main title page with author, title, subtitle, place, date, publisher.



2.12 Style WWUM

Tobias Südkamp asked me for that title for the Westfälischen Wilhelms-Universität Münster. The `professor` is more likely the `chairman`. Female referees should be prefixed by `[f]`. You can omit the examination date defining an empty `\examinationdatename`.

<p style="text-align: center;">Mein Name Titel der Arbeit 2022</p>	<p>The pages (in example <code>tilepage-WWUM.tex</code>) are:</p> <ol style="list-style-type: none"> 1. cover page with <code>author</code>, <code>title</code>, <code>\the\year</code> 2. the backside of the cover page is empty if it exists 3. main title page with <code>chair</code>, <code>title</code>, <code>subject</code>, <code>academicgrade</code>, <code>science</code>, <code>discipline</code>, <code>faculty</code> 4. main title back side with <code>professor</code>, <code>referee</code>, <code>oralexaminationdate</code> (normally empty)
<p style="text-align: center;">Experimentelle Physik</p> <p style="text-align: center;">Titel der Arbeit</p> <p style="text-align: center;">Inaugural-Dissertation zur Erlangung des Doktorgrades der Naturwissenschaften im Fachbereich Physik der Mathematisch-Naturwissenschaftlichen Fakultät der Westfälischen Wilhelms-Universität Münster</p> <p style="text-align: center;">vorgelegt von Mein Name aus Geburtsort -2022-</p>	<p>Dekan/Dekanin: Klaus Naschwarz</p> <p>Erster Gutachter: Peter Mustermann</p> <p>Zweite Gutachterin: Petra Musterfrau</p> <p>Datum der mündlichen Prüfung:</p> <p>Tag der Promotion:</p>

2.13 Style UKoLa

In 2007 several students asked me for the title of the Universität Koblenz-Landau. At that time, I've made a package for the title they asked for. The package has been published at <https://komascript.de/unikoblenzlandau> only. In 2021, after I've published `uni-titlepage`, it was time to implement this title also as a title style definition. Note, this is not an official style of the University Koblenz-Landau. Several referees can be separated by `\and`. Female referees should be prefixed by `[f]`.

The page (in example `titlepage-UKoLa.tex`) is:

1. main title page with `mainlogo`, `secondlogo`, `title`, `subject`, `academicgrade`, `chair`, `dicipline`, `place`, `author`, `referee`, and `date`.



Note: The upper left corner is the logo placeholder. If you'd download the logo from <http://www.uni-koblenz-landau.de/logo.png> and save it with the name `uni-koblenz-landau.png`, it would be used automatically.

3 Additonal Commands

`\NowButAfterBeginDocument` Command

```
\NowButAfterBeginDocument{<code>}
```

is something like `\AtBeginDocument`, but if you call it somewhere after `\begin{document}` argument `<code>` will be used immediately. This command is used inside some of the title page styles, because you may load them either at the preamble or even after `\begin{document}`, but some code should not be executed before `\begin{document}`.

`titlepage` (*env.*) In oposite to the `titlepage` environment of the standard classes,

```
\begin{titlepage}[<options>]
...
\end{titlepage}
```

knows some options. These are `pagestyle=<style>` and `pagenumber=<number>`. The first one changes the page style of the generated title page to the given `<style>`. If the option is not set, the default `empty` will be used. The second one sets the logical page number of the generated title page to the given `<number>` and sets the counter `pagenumber` to this value. If the option is not used, the value of counter `pagenumber` will be increased by one and the result is used for the logical page number.

`fullsizetitle` (*env.*) Using

```
\begin{fullsizetitle}[<options>]
...
\end{fullsizetitle}
```

is almost the same like above. But `fullsizetitle` removes the margins from the generated title page. Nevertheless if binding correction (aka binding offset) of package `typearea` or `geometry` could be recognized, it will not be removed. Some of the title page styles use this environment instead of `titlepage` inside `\maketitle`. With this the margins of the title page do not depend on the type area of the document.

`\usetitleelement` Command

```
\usetitleelement{<element>}
```

gives the content of the corresponding title `<element>`. Each main `<element>` defined by the package may be used. Those are currently: `advisor`, `author`, `chair`, `company`, `course`, `date`, `dedication`, `academicgrade`, `discipline`, `duration`, `faculty`, `homepage`, `mainlogo`, `matriculationnumber`, `oralexaminationdate`, `place`, `professor`, `publisher`, `referee`, `subject`, `subtitle`, `title`, `titlehead`, and `university`. Note: `student` isn't a main `<element>`, because it's only an alias for `author`.

`\usenonemptytitleelement` Command
added in v1.0

```
\usenonemptytitleelement{<element>}
```

is a variant of `\usetitleelement` that not only reports an error for a not existing `<element>` but also for an empty `<element>`. It should be used to print mandatory elements.

4 Implementation

Note: To generate all files, developers and beta testers should simply use the source from <https://github.com/komascript/uni-titlepage> and call

```
l3build unpack
l3build doc
```

The resulting documentation will be placed in the main folder. The unpacked style file are in build/unpacked, You can use

```
l3build install
```

to install them in TEXMFHOME. See the manual of `l3build` for more information.

As an alternative you can use the source distribution from CTAN and run:

```
tex uni-titlepage.dtx
```

The documentation is usually part of the source distribution at CTAN. Note, that all the generated `tex` files are example files. Do not copy them to the run-time files but the documentation folder!

4.1 The Installation Driver ‘uni-titlepage.ins’

First of all we produce `uni-titlepage.ins`, the installation driver. It starts very common with loading `docstrip`, preamble declaration and start of generation.

```
1 \def\batchfile{uni-titlepage.dtx}
2 \input docstrip.tex
3 \ifToplevel{%
4   \Msg{*****}
5   \Msg{*}
6   \Msg{* Steps of uni-titlepage generation:}
7   \Msg{* =====}
8   \Msg{*}
9   \Msg{* - Generation of all needed files:}
10  \keepsilent
11  \askforoverwritefalse
12 }
13
14 \preamble
15 Copyright (c) 2009-2022 by Markus Kohm <komascript(at)gmx.info>
16
17 This file was generated from file(s) of uni-titlepage distribution.
18
19 -----
20
21 This work may be distributed and/or modified under the conditions of
22 the LaTeX Project Public License, version 1.3c of the license.
23 The latest version of this license is in
24 http://www.latex-project.org/lppl.txt
25 and version 1.3c or later is part of all distributions of LaTeX
26 version 2005/12/01 or later.
27
28 This work has the LPPL maintenance status "maintained".
29
```



```

30 The Current Maintainer and author of this work is Markus Kohm.
31
32 This file may only be distributed together with
33 the file 'uni-titlepage.dtx'.
34 You may however distribute the file 'uni-titlepage.dtx' without this file.
35
36 \endpreamble
37
38 \generate{%

```

But while the dtx file is the ins file itself, we will never generate this file.

```

39 % \file{uni-titlepage.ins}{\from{uni-titlepage.dtx}{ins}}% not needed
40 \file{uni-titlepage.drv}{\from{uni-titlepage.dtx}{doc,manual}}%
41 \file{uni-titlepage.sty}{\from{uni-titlepage.dtx}{package}}%
42 \file{title-DHBW.def}{\from{uni-titlepage.dtx}{driver,DHBW}}%
43 \file{title-KOMAScript.def}{\from{uni-titlepage.dtx}{driver,KOMAScript}}%
44 \file{title-Markus-1.def}{\from{uni-titlepage.dtx}{driver,Markus,1}}%
45 \file{title-Markus-2.def}{\from{uni-titlepage.dtx}{driver,Markus,2}}%
46 \file{title-Spacer.def}{\from{uni-titlepage.dtx}{driver,Spacer}}%
47 \file{title-TU-DD.def}{\from{uni-titlepage.dtx}{driver,TU-DD}}%
48 \file{title-TU-HH.def}{\from{uni-titlepage.dtx}{driver,TU-HH}}%
49 \file{title-KIT.def}{\from{uni-titlepage.dtx}{driver,KIT}}%
50 \file{title-JT-Aufsaetze.def}{\from{uni-titlepage.dtx}{driver,JT-Aufsaetze}}%
51 \file{title-JT-Geschichte.def}{\from{uni-titlepage.dtx}{driver,JT-Geschichte}}%
52 \file{title-JT-Typography.def}{\from{uni-titlepage.dtx}{driver,JT-Typography}}%
53 \file{title-WWUM.def}{\from{uni-titlepage.dtx}{driver,WWUM}}%
54 \file{title-UKoLa.def}{\from{uni-titlepage.dtx}{driver,UKoLa}}%
55 \file{titlepage-DHBW.tex}{\from{uni-titlepage.dtx}{doc,example,DHBW}}%
56 \file{titlepage-KOMAScript.tex}{\from{uni-titlepage.dtx}{doc,example,KOMAScript}}%
57 \file{titlepage-Markus-1.tex}{\from{uni-titlepage.dtx}{doc,example,Markus,1}}%
58 \file{titlepage-Markus-2.tex}{\from{uni-titlepage.dtx}{doc,example,Markus,2}}%
59 \file{titlepage-Spacer.tex}{\from{uni-titlepage.dtx}{doc,example,Spacer}}%
60 \file{titlepage-TU-DD.tex}{\from{uni-titlepage.dtx}{doc,example,TU-DD}}%
61 \file{titlepage-TU-HH.tex}{\from{uni-titlepage.dtx}{doc,example,TU-HH}}%
62 \file{titlepage-KIT.tex}{\from{uni-titlepage.dtx}{doc,example,KIT}}%
63 \file{titlepage-JT-Aufsaetze.tex}{\from{uni-titlepage.dtx}{doc,example,JT-Aufsaetze}}%
64 \file{titlepage-JT-Geschichte.tex}{\from{uni-titlepage.dtx}{doc,example,JT-Geschichte}}%
65 \file{titlepage-JT-Typography.tex}{\from{uni-titlepage.dtx}{doc,example,JT-Typography}}%
66 \file{titlepage-WWUM.tex}{\from{uni-titlepage.dtx}{doc,example,WWUM}}%
67 \file{titlepage-UKoLa.tex}{\from{uni-titlepage.dtx}{doc,example,UKoLa}}%
68 \nopreamble\nopostamble
69 \file{README.md}{\from{uni-titlepage.dtx}{README}}%
70 }%
71
72 \ifToplevel{%
73 \Msg{* \space\space done.}
74 \Msg{*}
75 \Msg{* You may install all the files now.}
76 \Msg{*}
77 \Msg{*****}
78 }

```

At docstrip run we like to finish the file know:

```

79 \csname endinput\endcsname

```

4.2 The Package `scrbase`

`\TitleOptions` We use the extended option handling of KOMA-Script, so we load package `scrbase` and declare a family, a member and a something like `\KOMAoptions` and `\KOMAoption` but for this package.

```
80 \RequirePackage{scrbase}[2014/12/03]
81 \DefineFamily{title}
82 \DefineFamilyMember{title}
83 \newcommand*{\TitleOptions}{\FamilyOptions{title}}
84 \newcommand*{\TitleOption}{\FamilyOption{title}}
```

`pagenumber` (*opt.*)

```
85 \newcounter{titlepage}\setcounter{titlepage}{\@ne}
86 \DefineFamilyKey{title}{pagenumber}{%
87 \setcounter{titlepage}{#1}\FamilyKeyStateProcessed
88 }
```

`\titlepagestyle`
`pagestyle` (*opt.*)

```
89 \providecommand*{\titlepagestyle}{}
90 \renewcommand*{\titlepagestyle}{empty}
91 \DefineFamilyKey{title}{pagestyle}{%
92 \renewcommand*{\titlepagestyle}{#1}\FamilyKeyStateProcessed
93 }
```

`\if@restonecol`

```
94 \ifcsname @restonecolfalse\endcsname
95 \expandafter\@gobble
96 \else
97 \expandafter\@firstofone
98 \fi
99 {\newif\if@restonecol}
```

`titlepage` (*env.*)

```
100 \scr@ifundefinedorrelax{titlepage}{\def\titlepage{}}{}
101 \scr@ifundefinedorrelax{endtitlepage}{\def\endtitlepage{}}{}
102 \providecommand*{\maketitle}[1][1]{}{}
```

`\inittitle` Set of commands, that define a title style:

```
\makeprettitle 103 \newcommand*{\tp@undefinedtitle}[1]{%
\makeprettitleback 104 \PackageInfo{uni-titlepage}{leaving not defined #1-title page empty}%
\makemainttitle 105 }
\makemainttitleback 106 \newcommand*{\inittitle}{}
\makeposttitle 107 \newcommand*{\makeprettitle}{\tp@undefinedtitle{pre}}
\makeposttitleback 108 \newcommand*{\makeprettitleback}{\tp@undefinedtitle{back of pre}}
\exittitle 109 \newcommand*{\makemainttitle}{\tp@undefinedtitle{main}}
\tp@undefinedtitle 110 \newcommand*{\makemainttitleback}{\tp@undefinedtitle{back of main}}
111 \newcommand*{\makeposttitle}{\tp@undefinedtitle{post}}
112 \newcommand*{\makeposttitleback}{\tp@undefinedtitle{back of post}}
113 \newcommand*{\exittitle}{}{}
```

`\inittitlestyle` Will be called before loading a title style:

```
114 \newcommand*\inittitlestyle{%
115   \renewenvironment{titlepage}[1][1]{%
116     \TitleOptions{##1}%
117     \clearpage
118     \if@twocolumn
119       \@restonecoltrue\onecolumn
120     \else
121       \@restonecolfalse
122     \fi
123     \ifx\titlepagestyle\@empty\else\thispagestyle{\titlepagestyle}\fi
124     \if@twoside% im einseitigen Satz ist mir alles egal
125     \ifodd\value{page}% aktuelle Seite ist ungerade
Current page number is odd ...
126       \ifodd\value{titlepage}%
127       \else
... wanted page number is even: put in empty page.
128         \null\newpage
129         \fi
130       \else
Current page number is even ...
131         \ifodd\value{titlepage}%
... wanted page number is off: put in empty page.
132         \null\newpage % Leerseite
133         \fi
134       \fi
135     \fi
136     \setcounter{page}{\value{titlepage}}%
137     \ifx\titlepagestyle\@empty\else\thispagestyle{\titlepagestyle}\fi
138   }{%
139     \if@restonecol\twocolumn \else \newpage\fi
140     \stepcounter{titlepage}%
141   }%
142
143 \renewcommand*\maketitle[1][1]{%
144   \begingroup
145     \TitleOptions{##1}%
146     \inittitle
147     \makeprettitle\if@twoside\makeprettitleback\fi
148     \makemainttitle\if@twoside\makemainttitleback\fi
149     \makeposttitle\if@twoside\makeposttitleback\fi
150     \exittitle
151   \endgroup
152 }%
153
154 \renewcommand*\inittitle{}%
155 \renewcommand*\makeprettitle{\tp@undefinedtitle{pre}}%
156 \renewcommand*\makeprettitleback{\tp@undefinedtitle{back of pre}}%
157 \renewcommand*\makemainttitle{\tp@undefinedtitle{main}}%
158 \renewcommand*\makemainttitleback{\tp@undefinedtitle{back of main}}%
159 \renewcommand*\makeposttitle{\tp@undefinedtitle{post}}%
```

```

160 \renewcommand*{\makeposttitleback}{\tp@undefinedtitle{back of post}}%
161 \renewcommand*{\exittitle}{}%
162 }
163 \inittitlestyle

```

`\titlebox` New environment for full page titles (with respect to BCOR or Gm@bindingoffset if defined)

```

164 \newsavebox\titlebox
165 \newenvironment{fullsizetitle}[1][1][1]{%
166 \TitleOptions{#1}%
167 \begin{lrbox}{\titlebox}
168 \hsize\paperwidth
169 \scr@ifundefinedorrelax{ta@bcor}{%
170 \scr@ifundefinedorrelax{Gm@bindingoffset}{}{%
171 \advance\hsize-\Gm@bindingoffset}%
172 }{%
173 \advance\hsize-\ta@bcor
174 \scr@ifundefinedorrelax{Gm@bindingoffset}{}{%
175 \ifdim \Gm@bindingoffset=\ta@bcor\else
176 \PackageWarning{uni-titlepage}{Ignoring geometry's binding
177 correction,\MessageBreak
178 using typearea's binding correction.\MessageBreak
179 If you're using geometry and typearea,\MessageBreak
180 you should set both options to the same value,\MessageBreak
181 e.g. \string\KOMAOptions{BCOR=\the\ta@bcor}\MessageBreak
182 \space\space\space\space\space
183 \string\geometry{bindingoffset=\the\ta@bcor}\MessageBreak
184 to make uni-titlepage use this value%
185 }%
186 \fi
187 }%
188 }%
189 \vsize\paperheight
190 \linewidth\hsize
191 \columnwidth\hsize
192 \textwidth\hsize
193 \textheight\vsize
194 \noindent\minipage{\hsize}
195 }{%
196 \endminipage
197 \end{lrbox}
198 \begin{titlepage}%
199 \vspace*{-1in}\vskip-\topmargin\vskip-\headheight\vskip-\headsep
200 \vskip-\topskip
201 \raggedright
202 \leavevmode
203 \hskip-1in
204 \ifodd\c@page
205 \hskip-\oddsidemargin
206 \scr@ifundefinedorrelax{ta@bcor}{%
207 \scr@ifundefinedorrelax{Gm@bindingoffset}{}{%
208 \hskip\Gm@bindingoffset}%
209 }{\hskip\ta@bcor}%
210 \else

```

```

211     \hskip-\evensidemargin
212     \fi
213     \vbox to\z@\hspace\z@
214     \vskip-\baselineskip
215     \makebox[0pt][l]{\usebox\titlebox}%
216     \vss
217     }%
218 \end{titlepage}
219 }

```

\DefineSimpleTitleKey Define title page “variables”:

```

\DefineReplaceTitleKey 220 \newcommand*\tp@replacewarning}[2]{%
  \tp@replacewarning 221 \PackageWarning{uni-titlepage}{%
    \tp@dokeys 222 Using ‘#2’ instead of ‘#1’,\MessageBreak
    223 because ‘#1’ not defined%
    224 }%
    225 }
    226 \newcommand*\tp@dokeys{}
    227 \newcommand*\DefineSimpleTitleKey}[2][.\@currname.\@current]{%
    228 \l@addto@macro\tp@dokeys{\do{#2}}%
    229 \expandafter\newcommand\expandafter*\csname @#2\endcsname{%
    230 \expandafter\newcommand\expandafter*\csname #2\endcsname[1]{%
    231 \expandafter\gdef\csname @#2\endcsname{##1}}%
    232 \DefineFamilyKey[#1]{title}{#2}{%
    233 \csname #2\endcsname{##1}%
    234 \FamilyKeyStateProcessed
    235 }%
    236 }
    237 \newcommand*\DefineReplaceTitleKey}[3][.\@currname.\@current]{%
    238 \DefineFamilyKey[#1]{title}{#2}{%
    239 \tp@replacewarning{#2}{#3}%
    240 \FamilyOptions{title}{#3=##1}%
    241 }%
    242 }

```

```

  \titlehead
  \@titlehead 243 \providecommand*\@titlehead{}
  titlehead (opt.) 244 \providecommand{\titlehead}[1]{\gdef\@titlehead{#1}}
    245 \DefineFamilyKey{title}{titlehead}{\titlehead{#1}\FamilyKeyStateProcessed}

```

```

  \homepage
  \@homepage 246 \providecommand*\@homepage{}
  homepage (opt.) 247 \providecommand{\homepage}[1]{\gdef\@homepage{#1}}
    248 \DefineFamilyKey{title}{homepage}{\homepage{#1}\FamilyKeyStateProcessed}

```

```

  \title
  \@title 249 \let\@title\relax\let\title\relax\DefineSimpleTitleKey{title}
  title (opt.)

```

```

  \author
  \@author 250 \let\@author\relax\let\author\relax\DefineSimpleTitleKey{author}
  author (opt.)

```

```

\date
\@date 251 \let\@date\relax\let\date\relax\DefineSimpleTitleKey{date}
date (opt.)

\duration
\@duration 252 \DefineSimpleTitleKey{duration}
duration (opt.)

\course
\@course 253 \DefineSimpleTitleKey{course}
course (opt.)

\company
\@company 254 \DefineSimpleTitleKey{company}
company (opt.)

\subtitle
\@subtitle 255 \let\@subtitle\relax\let\subtitle\relax\DefineSimpleTitleKey{subtitle}
subtitle (opt.)

\university
\@university 256 \DefineSimpleTitleKey{university}
university (opt.)

\faculty
\@faculty 257 \DefineSimpleTitleKey{faculty}
faculty (opt.)

\chair
\@chair 258 \DefineSimpleTitleKey{chair}
chair (opt.)

\professor
\@professor 259 \DefineSimpleTitleKey{professor}
professor (opt.)

\subject
\@subject 260 \providecommand*\@subject{}
subject (opt.) 261 \providecommand*\subject}[1]{\gdef\@subject{#1}}
262 \l@addto@macro\tp@dokeys{\do{subject}}%
263 \DefineFamilyKey{title}{subject}{%
264 \Ifstr{#1}{project}{\subject{\projectpapername}}{%
265 \Ifstr{#1}{seminar}{\subject{\seminarpapername}}{%
266 \Ifstr{#1}{studentresearch}{\subject{\studentresearchname}}{%
267 \Ifstr{#1}{diploma}{\subject{\diplomathesisname}}{%
268 \Ifstr{#1}{degree}{\subject{\degreethesisname}}{%
269 \Ifstr{#1}{master}{\subject{\masterthesisname}}{%
270 \Ifstr{#1}{bachelor}{\subject{\bachelorthesisname}}{%
271 \subject{#1}%
272 }%
273 }%
274 }%
275 }%
276 }%
277 }%
278 }%
279 \FamilyKeyStateProcessed
280 }

```

`\Ifstr` For compatibility with old versions of `scrbase` the macro is provided based on `\ifstr` if it has not been defined by `scrbase`.
281 `\providecommand*\Ifstr}{\ifstr}`

`student` (*opt.*)
282 `\DefineReplaceTitleKey{student}{author}`

`\sience`
`\@sience` 283 `\DefineSimpleTitleKey{sience}`
`sience` (*opt.*)

`\discipline`
`\@discipline` 284 `\DefineSimpleTitleKey{discipline}`
`discipline` (*opt.*)

`\academicgrade`
`\@academicgrade` 285 `\DefineSimpleTitleKey{academicgrade}`
`academicgrade` (*opt.*)

`\matriculationnumber`
`\@matriculationnumber` 286 `\DefineSimpleTitleKey{matriculationnumber}`
`matriculationnumber` (*opt.*)

`\advisor`
`\@advisor` 287 `\DefineSimpleTitleKey{advisor}`
`advisor` (*opt.*)

`\referee`
`\@referee` 288 `\DefineSimpleTitleKey{referee}`
`referee` (*opt.*)

`\place`
`\@place` 289 `\DefineSimpleTitleKey{place}`
`place` (*opt.*)

`\publisher`
`\@publisher` 290 `\DefineSimpleTitleKey{publisher}`
`publisher` (*opt.*) 291 `\renewcommand*\@publisher}{\csname @publishers\endcsname}`

`\mainlogo`
`\@mainlogo` 292 `\DefineSimpleTitleKey{mainlogo}`
`mainlogo` (*opt.*)

`\secondlogo`
`\@secondlogo` 293 `\DefineSimpleTitleKey{secondlogo}`
`secondlogo` (*opt.*)

`\oralexaminationdate`
`\@oralexaminationdate` 294 `\DefineSimpleTitleKey{oralexaminationdate}`
`oralexaminationdate` (*opt.*)

```

\dedication
\@dedication 295 \providecommand*\@dedication{}
dedication (opt.) 296 \providecommand{\dedication}[1]{\gdef\@dedication{#1}}
297 \DefineFamilyKey{title}{dedication}{\dedication{#1}\FamilyKeyStateProcessed}

```

`\usetitleelement` Users cannot simply use, e.g., `\@title`, `\@mainlogo` etc. So we need a command `\@usetitleelement@error` to get them:

```

298 \newcommand*\@usetitleelement}[1]{%
299   \scr@ifundefinedorrelax{#1}{%
300     \@usetitleelement@error{#1}%
301   }{%
302     \scr@ifundefinedorrelax{@#1}{%
303       \@usetitleelement@error{#1}%
304     }{%
305       \@nameuse{@#1}%
306     }%
307   }%
308 }
309 \newcommand*\@usetitleelement@error}[1]{%
310   \PackageError{uni-titlepage}{'#1' isn't a title element}{%
311     You should use \string\usetitleelement\space for title elements
312     only!\MessageBreak
313     If you'll continue, command will be ignored.}%
314 }

```

`\usenonemptytitleelement` Sometimes we want to use a title element that must not be empty.

```

315 \newcommand*\@usenonemptytitleelement}[1]{%
316   \expandafter\ifx\csname @#1\endcsname\@empty
317   \PackageError{uni-titlepage}{empty title element '#1'}{%
318     Title element '#1' is empty but mandatory for the used title page
319     style.\MessageBreak
320     So it must not be empty.\MessageBreak
321     Please see the manual for more information about assigning
322     values to\MessageBreak
323     main title elements via options or commands.\MessageBreak
324     If you'll continue, a \string\strut\space will be used.}%
325   \strut
326   \else
327     \usetitleelement{#1}%
328   \fi
329 }

```

Some variables use their own configurable font:

```

titlepagefont (opt.)
\@titlepagefont 330 \scr@ifundefinedorrelax{newkomafont}{%
331   \newcommand*\@titlepagefont}{%
332 }{%
333   \newkomafont{titlepage}{}%
334 }
335 \DefineFamilyKey{title}{titlepagefont}{%
336   \renewcommand*\@titlepagefont{#1}%

```



```

337 \FamilyKeyStateProcessed
338 }

subjectfont (opt.)
\subject@font 339 \providecommand*\subject@font{\bfseries}
340 \DefineFamilyKey{title}{subjectfont}{%
341 \renewcommand*\subject@font{#1}%
342 \FamilyKeyStateProcessed
343 }

titlefont (opt.)
\title@font 344 \providecommand*\titlefont{\bfseries}
345 \DefineFamilyKey{title}{titlefont}{%
346 \renewcommand*\titlefont{#1}%
347 \FamilyKeyStateProcessed
348 }

subtitlefont (opt.)
\@subtitlefont 349 \providecommand*\@subtitlefont{\bfseries}
350 \DefineFamilyKey{title}{subtitlefont}{%
351 \renewcommand*\@subtitlefont{#1}%
352 \FamilyKeyStateProcessed
353 }

\TitlePageStyle Load a title page style from file
354 \newcommand*\TitlePageStyle[2] [] {%
355 \IfFileExists{title-#2.def}{%
356 \begingroup
357 \edef\@tempa{\endgroup
358 \noexpand\inittitlestyle
359 \noexpand\makeatletter
360 \noexpand\input{title-#2.def}%
361 \noexpand\catcode'\noexpand\@=\the\catcode'\@
362 }%
363 \@tempa
364 \TitleOptions{#1}%
365 }{%
366 \PackageError{uni-titlepage}{No title definition for ‘#2’ found}{%
367 You’ve tried to set title page style ‘#2’, but no title page
368 style definition file\MessageBreak
369 ‘title-#2.def’ may be found%
370 }%
371 }
372 }

\NowButAfterBeginDocument Nice shortcut:
373 \newcommand*\NowButAfterBeginDocument{%
374 \if@atdocument
375 \expandafter\@firstofone
376 \else
377 \expandafter\AtBeginDocument
378 \fi
379 }

```

380 \DeclareOption*{\expandafter\TitlePageStyle\expandafter{\CurrentOption}}
 381 \FamilyProcessOptions*\relax

\chairmanname Language dependent terms:

\projectpapername 382 \providecommand*{\chairmanname}{Chairman}
 \seminarpapername 383 \providecommand*{\projectpapername}{Project Paper}
 \studentreserchname 384 \providecommand*{\seminarpapername}{Seminar Paper}
 \diplomathesisname 385 \providecommand*{\studentresearchname}{Student Research Project}
 \degreethesisname 386 \providecommand*{\diplomathesisname}{Diploma Thesis}
 \masterthesisname 387 \providecommand*{\degreethesisname}{Degree Thesis}
 \bachelorthesisname 388 \providecommand*{\masterthesisname}{Master Thesis}
 \presentedbyname 389 \providecommand*{\bachelorthesisname}{Bachelor Thesis}
 \advisorname 390 \providecommand*{\presentedbyname}{presented by}
 \thename 391 \providecommand*{\advisorname}{Advisor}
 \ofthename 392 \providecommand*{\thename}{}
 \fromname 393 \providecommand*{\ofthename}{of the}
 \fromplacename 394 \providecommand*{\fromname}{from}
 \malerefereename 395 \providecommand*{\fromplacename}{from}
 \femalerefereename 396 \providecommand*{\malerefereename}{Referee}
 \ordinalmalerefereename 397 \providecommand*{\femalerefereename}{\refereename}
 \ordinalfemalerefereename 398 \providecommand*{\ordinalmalerefereename}{\refereename}
 \refereename 399 \providecommand*{\ordinalfemalerefereename}{\englishordinalfemalerefereename}
 \oralexaminationdatename 400 \providecommand*{\refereename}{\refereename}
 \ordinal 401 \providecommand*{\oralexaminationdatename}{Date of Oral Examination}
 \maleordinal 402 \providecommand*{\atthename}{at}
 \femaleordinal 403 \providecommand*{\durationname}{Processing Time}
 \indatename 404 \providecommand*{\matriculationnumbername}{Matriculationnumber}
 405 \providecommand*{\coursename}{Course}
 406 \providecommand*{\companyname}{Training Company}
 407 \providecommand*{\examinationname}{Examination}
 408 \providecommand*{\examinationdatename}{Date of Examination}
 409 \newcommand*{\ordinal}{\englishordinal}
 410 \newcommand*{\femaleordinal}{\ordinal}
 411 \newcommand*{\maleordinal}{\ordinal}
 412 \providecommand*{\indatename}{in}
 413 \providecaptionname{american,australian,british,canadian,%
 414 english,newzealand,UKenglish,USenglish}{\chairmanname}{Chairmain}%
 415 \providecaptionname{american,australian,british,canadian,%
 416 english,newzealand,UKenglish,USenglish}{\projectpapername}{Project Paper}%
 417 \providecaptionname{american,australian,british,canadian,%
 418 english,newzealand,UKenglish,USenglish}{\seminarpapername}{Seminar Paper}%
 419 \providecaptionname{american,australian,british,canadian,%
 420 english,newzealand,UKenglish,USenglish}{\studentresearchname}{Student
 421 Research Project}%
 422 \providecaptionname{american,australian,british,canadian,%
 423 english,newzealand,UKenglish,USenglish}{\diplomathesisname}{Diploma Thesis}%
 424 \providecaptionname{american,australian,british,canadian,%
 425 english,newzealand,UKenglish,USenglish}{\degreethesisname}{Degree Thesis}%
 426 \providecaptionname{american,australian,british,canadian,%
 427 english,newzealand,UKenglish,USenglish}{\masterthesisname}{Master Thesis}%
 428 \providecaptionname{american,australian,british,canadian,%
 429 english,newzealand,UKenglish,USenglish}{\bachelorthesisname}{Bachelor
 430 Thesis}%
 431 \providecaptionname{american,australian,british,canadian,%

432 english,newzealand,UKenglish,USenglish}{\ordinal}{\englishordinal}%
433 \providecaptionname{american,australian,british,canadian,%
434 english,newzealand,UKenglish,USenglish}{\presentedbyname}{presented by}%
435 \providecaptionname{american,australian,british,canadian,%
436 english,newzealand,UKenglish,USenglish}{\advisorname}{Advisor}%
437 \providecaptionname{american,australian,british,canadian,%
438 english,newzealand,UKenglish,USenglish}{\thename}{%}
439 \providecaptionname{american,australian,british,canadian,%
440 english,newzealand,UKenglish,USenglish}{\ofthename}{of the}%
441 \providecaptionname{american,australian,british,canadian,%
442 english,newzealand,UKenglish,USenglish}{\fromname}{from}%
443 \providecaptionname{american,australian,british,canadian,%
444 english,newzealand,UKenglish,USenglish}{\fromplacename}{from}%
445 \providecaptionname{american,australian,british,canadian,%
446 english,newzealand,UKenglish,USenglish}{\refereename}{Referee}%
447 \providecaptionname{american,australian,british,canadian,%
448 english,newzealand,UKenglish,USenglish}{\ordinalmalerefereename}{%
449 \englishordinalmalerefereename}%
450 \providecaptionname{american,australian,british,canadian,%
451 english,newzealand,UKenglish,USenglish}{\ordinalfemalerefereename}{%
452 \englishordinalfemalerefereename}%
453 \providecaptionname{american,australian,british,canadian,%
454 english,newzealand,UKenglish,USenglish}{\oralexaminationdatename}{Date of
455 Oral Examination}%
456 \providecaptionname{american,australian,british,canadian,%
457 english,newzealand,UKenglish,USenglish}{\durationname}{Processing Time}%
458 \providecaptionname{american,australian,british,canadian,%
459 english,newzealand,UKenglish,USenglish}{\matriculationnumbername}{Matriculationnumber}%
460 \providecaptionname{american,australian,british,canadian,%
461 english,newzealand,UKenglish,USenglish}{\coursename}{Course}%
462 \providecaptionname{american,australian,british,canadian,%
463 english,newzealand,UKenglish,USenglish}{\companyname}{Training Company}%
464 \providecaptionname{american,australian,british,canadian,%
465 english,newzealand,UKenglish,USenglish}{\examinationname}{Examination}%
466 \providecaptionname{american,australian,british,canadian,%
467 english,newzealand,UKenglish,USenglish}{\examinationdatename}{Date of
468 Examination}%
469 \providecaptionname{american,australian,british,canadian,%
470 english,newzealand,UKenglish,USenglish}{\indatename}{in}%
471 \providecaptionname{german,ngerman,austrian,naustrian,%
472 swissgerman,nswissgerman}{\chairmannname}{Dekan/Dekanin}%
473 \providecaptionname{german,ngerman,austrian,naustrian,%
474 swissgerman,nswissgerman}{\projectpapername}{Projektarbeit}%
475 \providecaptionname{german,ngerman,austrian,naustrian,%
476 swissgerman,nswissgerman}{\seminarpapername}{Seminararbeit}%
477 \providecaptionname{german,ngerman,austrian,naustrian,%
478 swissgerman,nswissgerman}{\studentresearchname}{Studienarbeit}%
479 \providecaptionname{german,ngerman,austrian,naustrian,%
480 swissgerman,nswissgerman}{\diplomathesisname}{Diplomarbeit}%
481 \providecaptionname{german,ngerman,austrian,naustrian,%
482 swissgerman,nswissgerman}{\degreethesisname}{Dissertation}%
483 \providecaptionname{german,ngerman,austrian,naustrian,%
484 swissgerman,nswissgerman}{\masterthesisname}{Master-Arbeit}%
485 \providecaptionname{german,ngerman,austrian,naustrian,%

486 swissgerman,nwissgerman}{\bachelorthesisname}{Bachelor-Arbeit}%
 487 \providecaptionname{german,ngerman,austrian,naustrian,%
 488 swissgerman,nwissgerman}{\ordinal}{\germanordinal}%
 489 \providecaptionname{german,ngerman,austrian,naustrian,%
 490 swissgerman,nwissgerman}{\femaleordinal}{\germanfemaleordinal}%
 491 \providecaptionname{german,ngerman,austrian,naustrian,%
 492 swissgerman,nwissgerman}{\maleordinal}{\germanmaleordinal}%
 493 \providecaptionname{german,ngerman,austrian,naustrian,%
 494 swissgerman,nwissgerman}{\presentedbyname}{eingereicht von}%
 495 \providecaptionname{german,ngerman,austrian,naustrian,%
 496 swissgerman,nwissgerman}{\advisorname}{Betreuer}%
 497 \providecaptionname{german,ngerman,austrian,naustrian,%
 498 swissgerman,nwissgerman}{\thename}{den}%
 499 \providecaptionname{german,ngerman,austrian,naustrian,%
 500 swissgerman,nwissgerman}{\ofthename}{der}%
 501 \providecaptionname{german,ngerman,austrian,naustrian,%
 502 swissgerman,nwissgerman}{\fromname}{von}%
 503 \providecaptionname{german,ngerman,austrian,naustrian,%
 504 swissgerman,nwissgerman}{\fromplacename}{aus}%
 505 \providecaptionname{german,ngerman,austrian,naustrian,%
 506 swissgerman,nwissgerman}{\refereename}{Gutachter}%
 507 \providecaptionname{german,ngerman,austrian,naustrian,%
 508 swissgerman,nwissgerman}{\ordinalmalerefereename}{%
 509 \germanordinalmalerefereename}%
 510 \providecaptionname{german,ngerman,austrian,naustrian,%
 511 swissgerman,nwissgerman}{\ordinalfemalerefereename}{%
 512 \germanordinalfemalerefereename}%
 513 \providecaptionname{german,ngerman,austrian,naustrian,%
 514 swissgerman,nwissgerman}{\femalerefereename}{Gutachterin}%
 515 \providecaptionname{german,ngerman,austrian,naustrian,%
 516 swissgerman,nwissgerman}{\oralexaminationdatename}{Datum der m\ "undlichen
 517 Pr\ "ufung}%
 518 \providecaptionname{german,ngerman,austrian,naustrian,%
 519 swissgerman,nwissgerman}{\durationname}{Bearbeitungszeitraum}%
 520 \providecaptionname{german,ngerman,austrian,naustrian,%
 521 swissgerman,nwissgerman}{\matriculationnumbername}{Matrikelnummer}%
 522 \providecaptionname{german,ngerman,austrian,naustrian,%
 523 swissgerman,nwissgerman}{\coursename}{Kurs}%
 524 \providecaptionname{german,ngerman,austrian,naustrian,%
 525 swissgerman,nwissgerman}{\companyname}{Ausbildungsfirma}%
 526 \providecaptionname{german,ngerman,austrian,naustrian,%
 527 swissgerman,nwissgerman}{\examinationname}{Pr\ "ufung}%
 528 \providecaptionname{german,ngerman,austrian,naustrian,%
 529 swissgerman,nwissgerman}{\examinationdatename}{Tag der Pr\ "ufung}%
 530 \providecaptionname{german,ngerman,austrian,naustrian,%
 531 swissgerman,nwissgerman}{\indatename}{im}%

\englishordinalmalerefereename

532 \newcommand*{\englishordinalmalerefereename}[1]{%
 533 \englishordinal{#1} \refereename%
 534 }

\englishordinalfemalerefereename

```

535 \newcommand*\englishordinalfemalerefereename}[1]{%
536   \englishordinalmalerefereename{#1}%
537 }

```

\germanordinalmalerefereename

```

538 \newcommand*\germanordinalmalerefereename}[1]{%
539   \ifnum #1<\@ne
540     \PackageError{uni-titlepage}{Ordinal of ‘#1’ not defined}{%
541       This package does only define German ordinal names for referees from 1}%
542   \else
543     \ifcase #1\or Erstgutachter\or Zweitgutachter\or Drittgutachter%
544     \or Viertgutachter\else
545       \PackageError{uni-titlepage}{Ordinal of ‘#1’ not defined}{%
546         This package does only define German ordinal names for referees up
547         to 4}%
548     \fi
549   \fi
550 }

```

germanordinalfemalerefereename

```

551 \newcommand*\germanordinalfemalerefereename}[1]{%
552   \germanordinalfemalerefereename{#1}in%
553 }

```

germanordinalmalecorrectorname

```

554 \newcommand*\germanordinalmalecorrectorname}[1]{%
555   \ifnum #1<\@ne
556     \PackageError{uni-titlepage}{Ordinal of ‘#1’ not defined}{%
557       This package does only define German ordinal names for correctors from 1}%
558   \else
559     \ifcase #1\or Erstkorrektor\or Zweitkorrektor\or Drittkorrektor%
560     \or Viertkorrektor\else
561       \PackageError{uni-titlepage}{Ordinal of ‘#1’ not defined}{%
562         This package does only define German ordinal names for correctors up
563         to 6}%
564     \fi
565   \fi
566 }

```

germanordinalfemalecorrectorname

```

567 \newcommand*\germanordinalfemalecorrectorname}[1]{%
568   \germanordinalmalecorrectorname{#1}in%
569 }

```

\englishordinal

```

570 \newcommand*\englishordinal}[1]{%
571   \ifcsname engordnumber\endcsname
572     \engordnumber{#1}%
573   \else
574     \ifnum #1<\@ne

```

```

575     \PackageError{uni-titlepage}{Ordinal of ‘#1’ not defined}{%
576       This package does only define English ordinals from 1}%
577   \else
578     \ifcase #1\or 1st\or 2nd\or 3rd\or 4th\or 5th\or 6th\or 7th\or 8th\or
579       9th\or 10th\else
580     \PackageError{uni-titlepage}{Ordinal of ‘#1’ not defined}{%
581       This package does only define English ordinals from 1 to
582       10.\MessageBreak
583       You may load package ‘engord’ to improve support of english
584       ordinals}%
585   \fi
586 \fi
587 \fi
588 }

```

```

\germanordinal
\germanmaleordinal 589 \newcommand*\germanordinal}[1]{%
\germanfemaleordinal 590 \ifnum #1<\@ne
591   \PackageError{uni-titlepage}{Ordinal of ‘#1’ not defined}{%
592     This package does only define german ordinals from 1}%
593 \else
594   #1.%
595 \fi
596 }
597 \newcommand*\germanmaleordinal}[1]{%
598 \ifcase #1
599   \PackageError{uni-titlepage}{Male ordinal of ‘#1’ not defined}{%
600     This package does only define german male ordinals from 1}%
601   \or Erster\or Zweiter\or Dritter\or Vierter\or F\"unfter\or Sechster%
602   \or Siebter\or Achter\or Neunter\or Zehnter\else
603   \PackageError{uni-titlepage}{Male ordinal of ‘#1’ not defined}{%
604     This package does only define german male ordinals up to 10}%
605 \fi
606 }
607 \newcommand*\germanfemaleordinal}[1]{%
608 \ifcase #1
609   \PackageError{uni-titlepage}{Female ordinal of ‘#1’ not defined}{%
610     This package does only define german female ordinals from 1}%
611   \or Erste\or Zweite\or Dritte\or Vierte\or F\"unfte\or Sechste%
612   \or Siebte\or Achte\or Neunte\or Zehnte\else
613   \PackageError{uni-titlepage}{Female ordinal of ‘#1’ not defined}{%
614     This package does only define german female ordinals up to 10}%
615 \fi
616 }

```

4.3 The titlepage Drivers

```

617 \begingroup
618 \def\PackageNotLoadedError#1{%
619   \GenericError{%
620     (#1)\@spaces\@spaces\@spaces\@spaces
621   }{%
622     File ‘#1’ Error: package ‘uni-titlepage’ hasn’t been loaded%

```

```

623 }{%
624 This definition file was made to be loaded by package
625 'uni-titlepage'.\MessageBreak
626 You may not use it without package 'uni-titlepage'!\MessageBreak
627 See the documentation of package 'uni-titlepage' for explanation.%
628 }%
629 }%
630 \ifx\csname uni-titlepage.sty@vers\endcsname\relax
631 \PackageNotLoadedError{%
632 <DHBW> title-DHBW.def%
633 <KOMAScript> title-KOMAScript.def%
634 <TU-DD> title-TU-DD.def%
635 <TU-HH> title-TU-HH.def%
636 <Markus & 1> title-Markus-1.def%
637 <Markus & 2> title-Markus-2.def%
638 <Spacer> title-Spacer.def%
639 <KIT> title-KIT.def%
640 <JT-Aufsaeetze> title-JT-Aufsaeetze.def%
641 <JT-Geschichte> title-JT-Geschichte.def%
642 <JT-Typography> title-JT-Typography.def%
643 <WWUM> title-WWUM.def%
644 <UKoLa> title-UKoLa.def%
645 }%
646 \fi
647 \endgroup

```

Each style corresponds with an own member. Nevertheless most styles will not have options in their own, because string options should be global to make change of style very easy.

```

648 \DefineFamilyMember[%
649 <DHBW> DHBW%
650 <KOMAScript> KOMAScript%
651 <TU-DD> TU-DD%
652 <TU-HH> TU-HH%
653 <Markus & 1> Markus-1%
654 <Markus & 2> Markus-2%
655 <Spacer> Spacer%
656 <KIT> KIT%
657 <JT-Aufsaeetze> JT-Aufsaeetze%
658 <JT-Geschichte> JT-Geschichte%
659 <JT-Typography> JT-Typography%
660 <WWUM> WWUM%
661 <UKoLa> UKoLa%
662 ]{title}

```

Nevertheless some styles have their own switches:

`blackborder` (*opt.*) `Trauertrand` at style TU-DD:

```
663 <TU-DD>\FamilyBoolKey[TU-DD]{title}{blackborder}{blackborder}
```

`final` (*opt.*) Style TU-HH distinguishes between drafts and final thesis.

```
664 <TU-HH>\FamilyBoolKey[TU-HH]{title}{final}{final}
```

`rulewidth` (*opt.*) Some styles have some variable rules at the title:

```
\title@rulewidth 665 <*Spacer | JT-Aufsaeetze | JT-Geschichte | Markus & 2>
```

`rulesep` (*opt.*)

```
\title@rulesep
```

`rulecolor` (*opt.*)

```
\title@rulecolor
```

```

666 \providecommand*{\title@rulewidth}{%
667 <Spacer | Markus & 2> Opt%
668 <JT-Aufsätze | JT-Geschichte> .25\textwidth
669 }
670 \providecommand*{\title@rulesep}{%
671 <Spacer | Markus & 2> \ifdim \title@rulewidth>\z@ 10pt\else \z@\fi
672 <JT-Aufsätze | JT-Geschichte> 1.5pt%
673 }
674 \providecommand*{\title@rulecolor}{}
675 \DefineFamilyKey[%
676 <Markus & 2> Markus-2%
677 <JT-Aufsätze> JT-Aufsätze%
678 <JT-Geschichte> JT-Geschichte%
679 <Spacer> Spacer%
680 ]{\title}{rulewidth}{%
681 \gdef\title@rulewidth{\dimexpr #1\relax}%
682 \FamilyKeyStateProcessed
683 }
684 \DefineFamilyKey[%
685 <Markus & 2> Markus-2%
686 <JT-Aufsätze> JT-Aufsätze%
687 <JT-Geschichte> JT-Geschichte%
688 <Spacer> Spacer%
689 ]{\title}{rulesep}{%
690 \gdef\title@rulesep{\dimexpr #1\relax}%
691 \FamilyKeyStateProcessed
692 }
693 \FamilyStringKey[%
694 <Markus & 2> Markus-2%
695 <JT-Aufsätze> JT-Aufsätze%
696 <JT-Geschichte> JT-Geschichte%
697 <Spacer> Spacer%
698 ]{\title}{rulecolor}{\title@rulecolor}
699 </Spacer | JT-Aufsätze | JT-Geschichte | Markus & 2>

```

An some has their own terms:

```

\presentationinformationUKoLa
\presentationinformationWWUM 700 % \changes{v1.0}{2022/03/22}{using \cs{usenonemptytitleelement}}
\presentationinformationTUHH 701 <*UKoLa>
\presentationinformationDHBW 702 \providecommand*{\presentationinformationUKoLa}{%
\presentationinformationKIT 703 to obtain the degree\\
704 \usenonemptytitleelement{academicgrade}\\
705 of \usenonemptytitleelement{discipline}\\
706 }
707 \providecaptionname{american,australian,british,canadian,%
708 english,newzealand,UKenglish,USenglish}{\presentationinformationUKoLa}{%
709 to obtain the degree\\
710 \usenonemptytitleelement{academicgrade}\\
711 of \usenonemptytitleelement{discipline}\\
712 }%
713 \providecaptionname{german,ngerman,austrian,naustrian,%
714 swissgerman,nswissgerman}{\presentationinformationUKoLa}{%
715 zur Erlangung des Grades eines\\

```



```

716 \usenonemptytitleelement{academicgrade}\\
717 im Studiengang \usenonemptytitleelement{discipline}\\
718 }%
719 </UKoLa>
720 <*DHBW>
721 \providecommand*{\presentationinformationDHBW}{%
722 for the \examinationname{} of\\[.5\baselineskip]
723 \usenonemptytitleelement{academicgrade}\\[Opt plus 1fill]
724 of \usenonemptytitleelement{discipline}\\[.5\baselineskip]
725 at the \usenonemptytitleelement{university}\ifx@place@empty\else\space@place\fi
726 }
727 \providecaptionname{american,australian,british,canadian,%
728 english,newzealand,UKenglish,USenglish}{\presentationinformationDHBW}{%
729 for the \examinationname\\[.5\baselineskip]
730 \usenonemptytitleelement{academicgrade}\\[Opt plus 1fill]
731 of degree course \usenonemptytitleelement{discipline}\\[.5\baselineskip]
732 at the \usenonemptytitleelement{university}\ifx@place@empty\else\space@place\fi
733 }%
734 \providecaptionname{german,ngerman,austrian,naustrian,%
735 swissgerman,nswissgerman}{\presentationinformationDHBW}{%
736 f"ur die \examinationname{} zum\\[.5\baselineskip]
737 \usenonemptytitleelement{academicgrade}\\[Opt plus 1fill]
738 des Studienganges \usenonemptytitleelement{discipline}\\[.5\baselineskip]
739 an der \usenonemptytitleelement{university}\ifx@place@empty\else\space@place\fi
740 }%
741 </DHBW>
742 <*TU-HH>
743 \providecommand*{\presentationinformationTUHH}{%
744 \iffinal Of the \else The \fi Graduation Committee of the\\
745 \usenonemptytitleelement{university}\\[.5ex]
746 to the Acquisition of the Academic Degree\\[.5ex]
747 \usenonemptytitleelement{academicgrade}\\[.5ex]
748 \iffinal approved \else submitted \fi@subject}
749 \providecaptionname{american,australian,british,canadian,%
750 english,newzealand,UKenglish,USenglish}{\presentationinformationTUHH}{%
751 \iffinal Of the \else The \fi Graduation Committee of the\\
752 \usenonemptytitleelement{university}\\[.5ex]
753 to the Acquisition of the Academic Degree\\[.5ex]
754 \usenonemptytitleelement{academicgrade}\\[.5ex]
755 \iffinal approved \else submitted \fi@subject}
756 \providecaptionname{german,ngerman,austrian,naustrian,%
757 swissgerman,nswissgerman}{\presentationinformationTUHH}{%
758 \iffinal Vom \else Dem \fi Promotionsausschuss der\\
759 \usenonemptytitleelement{university}\\[.5ex]
760 zur Erlangung des akademischen Grades\\[.5ex]
761 \usenonemptytitleelement{academicgrade}\\[.5ex]
762 \iffinal genehmigte \else vorgelegte \fi@subject}%
763 </TU-HH>
764 <*KIT>
765 \providecommand*{\presentationinformationKIT}{%
766 At the \usenonemptytitleelement{faculty}\\
767 \strut\ignorespaces\@chair\\
768 }
769 \providecaptionname{american,australian,british,canadian,%

```

```

770 english,newzealand,UKenglish,USenglish}{\presentationinformationKIT}{%
771 At the \usenonemptytitleelement{faculty}\\
772 \strut\ignorespaces\@chair\\
773 }%
774 \providecaptionname{german,ngerman,austrian,naustrian,%
775 swissgerman,nswissgerman}{\presentationinformationKIT}{%
776 An der \usenonemptytitleelement{faculty}\\
777 \strut\ignorespaces\@chair\\
778 }%
779 </KIT>
780 <*WWUM>
781 \providecommand*{\presentationinformationWWUM}{%
782 \usenonemptytitleelement{subject}\\
783 to the Aquisition of the Academic Degree\\
784 \usenonemptytitleelement{academicgrade}\\
785 of the \usenonemptytitleelement{science} of \usenonemptytitleelement{discipline}\\
786 of the \usenonemptytitleelement{faculty} faculty\\
787 of the \usenonemptytitleelement{university}}%
788 }
789 \providecaptionname{american,australian,british,canadian,%
790 english,newzealand,UKenglish,USenglish}{\presentationinformationWWUM}{%
791 \usenonemptytitleelement{subject}\\
792 to the Aquisition of the Academic Degree\\
793 \usenonemptytitleelement{academicgrade}\\
794 of the \usenonemptytitleelement{science} of \usenonemptytitleelement{discipline}\\
795 of the \usenonemptytitleelement{faculty} faculty\\
796 of the \usenonemptytitleelement{university}}%
797 }
798 \providecaptionname{german,ngerman,austrian,naustrian,%
799 swissgerman,nswissgerman}{\presentationinformationWWUM}{%
800 \usenonemptytitleelement{subject}\\
801 zur Erlangung des \usenonemptytitleelement{academicgrade}\\
802 der \usenonemptytitleelement{science} im Fachbereich
803 \usenonemptytitleelement{discipline}\\
804 der \usenonemptytitleelement{faculty} Fakult"at\\
805 der \usenonemptytitleelement{university}}%
806 }
807 </WWUM>

```

```

\KITlongname
\fromname 808 <*KIT>
\refereename 809 \providecaptionname{american,australian,british,canadian,%
\KITurl 810 english,newzealand,UKenglish,USenglish}{\KITlongname}{%
811 University of the State of Baden-W"urttemberg and National Research Center
812 of the Helmholtz Association%
813 }%
814 \providecaptionname{german,ngerman,austrian,naustrian,%
815 swissgerman,nswissgerman}{\KITlongname}{%
816 Universit"at des Landes Baden-W"urttemberg und nationales
817 Forschungszentrum in der Helmholtz-Gemeinschaft
818 }%
819 \scr@ifundefinedorrelax{captionsamerican}{\fromname}{%
820 \renewcaptionname{american}{\fromname}{of}}%
821 \renewcaptionname{american}{\refereename}{Reviewer}}%

```

```

822 }%
823 \scr@ifundefinedorrelax{captionaustralian}{-}{%
824   \renewcaptionname{australian}{\fromname}{of}%
825   \renewcaptionname{australian}{\refereename}{Reviewer}%
826 }%
827 \scr@ifundefinedorrelax{captionbritish}{-}{%
828   \renewcaptionname{british}{\fromname}{of}%
829   \renewcaptionname{british}{\refereename}{Reviewer}%
830 }%
831 \scr@ifundefinedorrelax{captioncanadian}{-}{%
832   \renewcaptionname{canadian}{\fromname}{of}%
833   \renewcaptionname{canadian}{\refereename}{Reviewer}%
834 }%
835 \scr@ifundefinedorrelax{captionenglish}{-}{%
836   \renewcaptionname{english}{\fromname}{of}%
837   \renewcaptionname{english}{\refereename}{Reviewer}%
838 }%
839 \scr@ifundefinedorrelax{captionnewzealand}{-}{%
840   \renewcaptionname{newzealand}{\fromname}{of}%
841   \renewcaptionname{newzealand}{\refereename}{Reviewer}%
842 }%
843 \scr@ifundefinedorrelax{captionUKenglish}{-}{%
844   \renewcaptionname{UKenglish}{\fromname}{of}%
845   \renewcaptionname{UKenglish}{\refereename}{Reviewer}%
846 }%
847 \scr@ifundefinedorrelax{captionUSenglish}{-}{%
848   \renewcaptionname{USenglish}{\fromname}{of}%
849   \renewcaptionname{USenglish}{\refereename}{Reviewer}%
850 }%
851 \newcommand*{\KITurl}{www.kit.edu}
852 </KIT>

```

```

\presentedbyname
\ordinalmalerefereename 853 <*WWUM | UKoLa>
\ordinalfemalerefereename 854 \NowButAfterBeginDocument
855 {%
856   \providecaptionname{german,ngerman,austrian,naustrian,
857     swissgerman,nswissgerman}{\presentedbyname}{vorgelegt von}%
858   \scr@ifundefinedorrelax{captiongerman}{-}{%
859     \renewcaptionname{german}{\presentedbyname}{vorgelegt von}%
860     \renewcaptionname{german}{\ordinalfemalerefereename}{%
861       \ordinalfemalecorrectorname}%
862   }%
863   \scr@ifundefinedorrelax{captionsgerman}{-}{%
864     \renewcaptionname{ngerman}{\presentedbyname}{vorgelegt von}%
865     \renewcaptionname{ngerman}{\ordinalmalerefereename}{%
866       \germanordinalmalecorrectorname}%
867     \renewcaptionname{ngerman}{\ordinalfemalerefereename}{%
868       \germanordinalfemalecorrectorname}%
869   }%
870   \scr@ifundefinedorrelax{captionaustrian}{-}{%
871     \renewcaptionname{austrian}{\presentedbyname}{vorgelegt von}%
872     \renewcaptionname{austrian}{\ordinalmalerefereename}{%

```

```

873     \germanordinalmalecorrectorname}%
874     \renewcaptionname{austrian}{\ordinalfemalerefereename}{%
875     \germanordinalfemalecorrectorname}%
876 }%
877 \scr@ifundefinedorrelax{captionснаustrian}{}{%
878     \renewcaptionname{naustrian}{\presentedbyname}{vorgelegt von}%
879     \renewcaptionname{naustrian}{\ordinalmalerefereename}{%
880     \germanordinalmalecorrectorname}%
881     \renewcaptionname{naustrian}{\ordinalfemalerefereename}{%
882     \germanordinalfemalecorrectorname}%
883 }%
884 \scr@ifundefinedorrelax{captionsswissgerman}{}{%
885     \renewcaptionname{swissgerman}{\presentedbyname}{vorgelegt von}%
886     \renewcaptionname{swissgerman}{\ordinalmalerefereename}{%
887     \germanordinalmalecorrectorname}%
888     \renewcaptionname{swissgerman}{\ordinalfemalerefereename}{%
889     \germanordinalfemalecorrectorname}%
890 }%
891 \scr@ifundefinedorrelax{captionsswissgerman}{}{%
892     \renewcaptionname{nswissgerman}{\presentedbyname}{vorgelegt von}%
893     \renewcaptionname{nswissgerman}{\ordinalmalerefereename}{%
894     \germanordinalmalecorrectorname}%
895     \renewcaptionname{nswissgerman}{\ordinalfemalerefereename}{%
896     \germanordinalfemalecorrectorname}%
897 }%
898 }
899 </WWUM | UKoLa>

```

While style initialization, something may change:

```

900 \renewcommand*{\inittitle}{%
style KOMAScript redefines some footnote macros:
901 <*KOMAScript>
902   \let\footnotesize\small
903   \let\footnoterule\relax
904   \let\footnote\thanks
905   \renewcommand*\thefootnote{\@fnsymbol\c@footnote}%
906   \let\@oldmakefnmark\@makefnmark
907   \renewcommand*{\@makefnmark}{\rlap\@oldmakefnmark}%
908 </KOMAScript>
styles DHBW, TU-DD, TU-HH, KIT, and UKoLa set some variable if not already done
909 <*DHBW | TU-DD | TU-HH | KIT | WWUM>
910   \ifx\@university\@empty
911     \university{%
912 <DHBW>     Dualen Hochschule%
913 <TU-DD>     Technische\ nobreakspace Universit\ "at\ nobreakspace Dresden%
914 <TU-HH>     Technische\ nobreakspace Universit\ "at\ nobreakspace
915 <TU-HH>     Hamburg-Harburg%
916 <KIT>       KIT -- \KITlongname
917 <WWUM>     Westf\ "alischen Wilhelms-Universit\ "at M\ "unster%
918     }%
919   \fi
920 </DHBW | TU-DD | TU-HH | KIT | WWUM>
921 <*DHBW | TU-DD | TU-HH | KIT | WWUM | UKoLa>

```

```

922 \ifx\@place\@empty
923 \place{%
924 <DHBW>      Baden-W\ "urttemberg%
925 <TU-DD>     Dresden%
926 <TU-HH>     Hamburg%
927 <KIT>       Karlsruhe%
928 <*WWUM>
929 \PackageError{uni-titlepage}{Birth 'place' missing}{%
930     Style 'WWUM' needs the birth place of the student, so option 'place=...'
931     resp. \MessageBreak
932     command '\string\place{...}' is mandatory}%
933 </WWUM>
934 <UKoLa>     Koblenz%
935 }
936 \fi
937 <*DHBW | UKoLa>
938 \ifx\@mainlogo\@empty
939 <DHBW>      \IfFileExists{DHBW_d_MOS_195x95_rgb_300.jpg}{%
940 <UKoLa>     \IfFileExists{uni-koblenz-landau.png}{%
941 \scr@ifundefinedorrelax{includegraphics}{%
942 \if@atdocument\else\RequirePackage{graphicx}\fi
943 }{}%
944 \scr@ifundefinedorrelax{includegraphics}{}{}%
945 \mainlogo{%
946 <*DHBW>
947 \includegraphics[width=57mm,height=27mm]
948 {DHBW_d_MOS_195x95_rgb_300.jpg}%
949 </DHBW>
950 <*UKoLa>
951 \includegraphics[width=63mm,height=10mm]
952 {uni-koblenz-landau.png}
953 </UKoLa>
954 }%
955 }%
956 }{}%
957 \fi
958 </DHBW | UKoLa>
959 <*DHBW>
960 \ifx\@titlehead\@empty
961 \titlehead{\hspace*\fill}\@mainlogo}%
962 \fi
963 </DHBW>
964 <*DHBW | UKoLa>
965 \ifx\@titlepagefont\@empty
966 \renewcommand*{\@titlepagefont}{%
967 <DHBW>      \normalfont\sffamily
968 <UKoLa>     \normalfont
969 }%
970 \fi
971 </DHBW | UKoLa>
972 <*KIT>
973 \ifx\@homepage\@empty
974 \homepage{\KITurl}%
975 \fi

```

```

976 \ifx\@mainlogo\@empty
Try to detect one of the suitable PNGs of the KIT logo from https://de.
wikipedia.org/wiki/Datei:Logo\_KIT.svg.
977 \def\KIT@logo{KITLogo_RGB.pdf}\IfFileExists{\KIT@logo}{}{}%
978 \def\KIT@logo{2560px-Logo_KIT.svg.png}\IfFileExists{\KIT@logo}{}{}%
979 \def\KIT@logo{2000px-Logo_KIT.svg.png}\IfFileExists{\KIT@logo}{}{}%
980 \def\KIT@logo{1280px-Logo_KIT.svg.png}\IfFileExists{\KIT@logo}{}{}%
981 \def\KIT@logo{1024px-Logo_KIT.svg.png}\IfFileExists{\KIT@logo}{}{}%
982 \def\KIT@logo{1000px-Logo_KIT.svg.png}\IfFileExists{\KIT@logo}{}{}%
983 \def\KIT@logo{800px-Logo_KIT.svg.png}\IfFileExists{\KIT@logo}{}{}%
984 \def\KIT@logo{640px-Logo_KIT.svg.png}\IfFileExists{\KIT@logo}{}{}%
985 \def\KIT@logo{500px-Logo_KIT.svg.png}%
986 }}}}]}%
987 \IfFileExists{\KIT@logo}{%
988 \scr@ifundefinedorrelax{includegraphics}{%
989 \if@atdocument\else\RequirePackage{graphicx}\fi
990 }{}%
991 \scr@ifundefinedorrelax{includegraphics}{}{%
992 \mainlogo{%
993 \includegraphics[width=40mm,height=18.5mm]{\KIT@logo}%
994 }%
995 }%
996 }{}%
997 \fi
998 \ifx\@titlehead\@empty
999 \titlehead{\@mainlogo\hspace*{\fill}}%
1000 \fi
1001 \ifx\@titlepagefont\@empty
1002 \renewcommand*{\@titlepagefont}{\usefont{T1}{phv}{m}{n}}%
1003 \fi
1004 </KIT>
1005 <*WWUM>
1006 \ifx\@titlepagefont\@empty
1007 \renewcommand*{\@titlepagefont}{\normalfont\large}%
1008 \fi
1009 </WWUM>
1010 </DHBW | TU-DD | TU-HH | KIT | WWUM | UKoLa>
style Markus-2 uses it's own pagestyle at the first title page
1011 <*Markus & 2>
1012 \def\ps@maintitle{%
1013 \ps@empty
1014 \def\@oddhead{%
1015 \parbox[b][\headheight][b]{\hspace}{\@titlepagefont{%
1016 \csname @titlehead\endcsname}}%
1017 }%
1018 \let\@evenhead\@oddhead
1019 }%
1020 </Markus & 2>
styles JT-Aufsaeetze and JT-Geschichte set some font defaults:
1021 <*JT-Aufsaeetze | JT-Geschichte>
1022 \ifx\@titlepagefont\@empty
1023 <JT-Aufsaeetze> \renewcommand*{\@titlepagefont}{\normalfont\Huge\itshape}%

```

```

1024 <*JT-Geschichte)
1025   \scr@ifundefinedorrelax{lsstyle}{%
1026     \renewcommand*{\@titlepagefont}{\normalfont\let\@tpf@extra\scshape}%
1027   }{%
1028     \renewcommand*{\@titlepagefont}{%
1029       \normalfont\def\@tpf@extra{\lsstyle\MakeUppercase}%
1030     }%
1031   }
1032 </JT-Geschichte)
1033 \fi
1034 \ifx\titlefont\@empty
1035   \renewcommand*{\titlefont}{\normalfont}%
1036 \fi
1037 </JT-Aufsaezte | JT-Geschichte)
1038 <*JT-Typography)
1039 \ifx\@titlepagefont\@empty
1040   \renewcommand*{\@titlepagefont}{\normalfont\sffamily\bfseries}%
1041 \fi
1042 </JT-Typography)
1043 }

```

\publishers KOMA-Script defines this macro. But we use \publisher instead.

```

1044 <KOMAScript)\providecommand*\publishers{\publisher}

```

\makemaintitle This differs from style to style:

```

1045 \renewcommand*\makemaintitle{%
1046   \begin{%
1047     <DHBW | TU-DD | TU-HH | KIT)   fullsizetitle}
1048 <*KOMAScript | Markus | Spacer | JT-Aufsaezte | JT-Geschichte | JT-Typography | WWUM | UKoLa)
1049   titlepage}
1050 </KOMAScript | Markus | Spacer | JT-Aufsaezte | JT-Geschichte | JT-Typography | WWUM | UKoLa)
1051   \setlength{\parskip}{\z@}%
1052   \setlength{\parindent}{\z@}%
1053   \setlength{\parfillskip}{\z@\@plus 1fil}%
1054   \linespread{1}\selectfont
1055   \@titlepagefont
1056 <*DHBW)
1057   \vspace*{12mm}%
1058   \centering
1059   \begin{minipage}[t][\dimexpr\vsize-36mm\relax][\dimexpr\hsize-40mm\relax]%
1060     \@titlehead\par
1061     \centering
1062     \Large
1063     \vfill
1064     {\titlefont{\Large\usenonemptytitleelement{title}}}\par
1065     \vfill
1066     {\subjectfont{\Large\usenonemptytitleelement{subject}}\par}}%
1067     \vfill
1068     \presentationinformationDHBW\par
1069     \vfill
1070     \fromname\[\.5\baselineskip]
1071     \usenonemptytitleelement{author}\par

```

```

1072     \vfill
1073     \@date\par
1074     \vfill
1075     \begin{tabular}{*2{p{.5\dimexpr\linewidth-3\tabcolsep\relax}}@{}}
1076         \durationname & \@duration \\[.5ex]
1077         \matriculationnumbername, \coursename & \usenonemptytitleelement{matriculationnum
1078         & \usenonemptytitleelement{course}\\[.5ex]
1079         \companyname & \usenonemptytitleelement{company} \\[.5ex]
1080         \advisorname{} \ofthename{} \companyname & \usenonemptytitleelement{advisor} \\[.5ex]
1081         \refereename{} \ofthename{} \@university & \usenonemptytitleelement{referee}
1082     \end{tabular}
1083     \end{minipage}
1084 </DHBW>
1085 <*KOMAScript>
1086     \ifx\@titlehead\@empty \else
1087         \begin{minipage}[t]{\textwidth}%
1088             \@titlehead
1089         \end{minipage}\par
1090     \fi
1091     \null\vfill
1092     \begingroup
1093         \centering
1094         \ifx\@subject\@empty \else
1095             {\subject@font{\@subject \par}}%
1096             \vskip 3em
1097         \fi
1098         {\titlefont{\huge \usenonemptytitleelement{title}\par}}%
1099         \vskip 1em
1100         {\ifx\@subtitle\@empty\else\@subtitlefont{\@subtitle}\par\fi}%
1101         \vskip 2em
1102         {\Large \lineskip 0.75em
1103             \begin{tabular}[t]{c}
1104                 \@author
1105             \end{tabular}\par
1106         }%
1107         \vskip 1.5em
1108         {\Large \@date \par}%
1109         \vskip \z@ \@plus3fill
1110         {\Large \@publisher \par}%
1111         \vskip 3em
1112     \endgroup
1113     \@thanks
1114     \vfill\null\vskip-\baselineskip
1115 </KOMAScript>
1116 <*TU-DD>
1117     \rule{0pt}{5mm}\par
1118     \ifblackborder
1119         \leavevmode\hskip 1cm
1120         \setlength{\fboxrule}{1pt}%
1121         \expandafter\fbox
1122     \else
1123         \expandafter\mbox
1124     \fi
1125     {%

```



```

1126 \begin{minipage}[t][\dimexpr\textheight-2.5cm\relax][t]{%
1127 \dimexpr\linewidth\ifblackborder-3cm\fi\relax}
1128 \sffamily
1129 \centering
1130 \vskip 3cm
1131 {\fontsize{28pt}{34pt}\selectfont
1132 \strut\ignorespaces\@university\unskip\strut\\}
1133 {\fontsize{24pt}{28pt}\selectfont
1134 \strut\ignorespaces\@faculty\unskip\strut\\}
1135 {\fontsize{20pt}{24pt}\selectfont
1136 \strut\ignorespaces\@chair\unskip\strut\\
1137 \strut\ignorespaces\@professor\unskip\strut\\
1138 \vfill
1139 {\bfseries\strut\ignorespaces\@title\unskip\strut\\}
1140 \strut\ignorespaces\@subject\unskip\strut\\
1141 \vfill
1142 \raggedright
1143 \hspace*{.25\linewidth}%
1144 \strut\ignorespaces\presentedbyname\unskip\strut\\
1145 \hspace*{.25\linewidth}\quad
1146 \begin{tabular}{@{}l@{}}
1147 \strut\ignorespaces\@author\unskip\strut\\
1148 \strut\ignorespaces\@discipline\unskip\strut\\
1149 \strut\ignorespaces\@matriculationnumber\unskip\strut\\
1150 \end{tabular}\\
1151 \vskip\baselineskip
1152 \hspace*{.25\linewidth}%
1153 \strut\ignorespaces\advisorname\unskip:\strut\\
1154 \hspace*{.25\linewidth}\quad
1155 \begin{tabular}{@{}l@{}}
1156 \strut\ignorespaces\usenonemptytitleelement{advisor}\unskip\strut\\
1157 \end{tabular}
1158 \vskip2\baselineskip
1159 \hspace*{.25\linewidth}%
1160 \strut\ignorespaces\@place,\nobreakspace\thename\nobreakspace\@date
1161 \par}
1162 \vspace*{5mm}
1163 \end{minipage}
1164 }%
1165 </TU-DD>
1166 <*TU-HH>
1167 \sffamily
1168 \centering
1169 \vspace{5cm}
1170 {\LARGE\bfseries\strut\ignorespaces\@title\\}
1171 {\Large\strut\ignorespaces\@subtitle\\}
1172 \vspace{2.5cm}
1173 {\Large\presentationinformationTUHH\\}
1174 \vspace{2.5cm}
1175 {\Large\strut\ignorespaces\fromname\\
1176 \strut\ignorespaces\usenonemptytitleelement{author}\\}
1177 \vspace{2.5cm}
1178 {\Large\strut\ignorespaces\fromplacename\\
1179 \strut\ignorespaces\usenonemptytitleelement{place}\\}

```

```

1180     \vspace{2.5cm}
1181     {\Large@date}
1182 </TU-HH>
1183 <*WWUM>
1184     \centering
1185     \usenonemptytitleelement{chair}\\
1186     \vspace{2cm}
1187     \usenonemptytitleelement{title}\\
1188     \vfill
1189     \presentationinformationWWUM\\
1190     \vfill
1191     \presentedbyname\\
1192     \usenonemptytitleelement{author}\\
1193     \ifx\@place\@empty\else\fromplacename{} \@place\\\fi
1194     --,\the\year\,--
1195 </WWUM>
1196 <*Markus & 1>
1197     \raggedright
1198     {\subject@font{%
1199         \large\strut\ignorespaces\@subject\par\vskip 2\baselineskip}}%
1200     {\titlefont{\LARGE\strut\ignorespaces\@title\par}}%
1201     {\@subtitlefont{%
1202         \large\vskip.5\baselineskip\strut\ignorespaces\@subtitle\par}}%
1203     \vfill
1204     {\csname @datefont\endcsname{\large\strut\ignorespaces\@date\par}}%
1205 </Markus & 1>
1206 <*Spacer | Markus & 2>
1207     \raggedright
1208 <Markus & 2>     \thispagestyle{maintitle}%
1209     \raisebox{0pt}[\ht\strutbox][\dimexpr\textheight-\ht\strutbox\relax]{%
1210     \ifx\title@rulecolor\@empty\else
1211     \@ifundefined{color}{\color{\title@rulecolor}}%
1212     \fi
1213     \rule[\dimexpr-.667\headsep-\textheight\relax
1214     {\title@rulewidth}
1215     {\dimexpr\textheight+2\headsep\relax}\kern\title@rulesep
1216     ]%
1217     \parbox[t][\textheight][t]
1218     {\dimexpr \textwidth-\title@rulewidth-\title@rulesep\relax}{%
1219     \raggedright
1220 <*Spacer>
1221     \ifx\@titlehead\@empty\else
1222     \raisebox{\dimexpr\ht\strutbox-\totalheight\relax}{%
1223     \parbox[t]{\linewidth}{\@titlehead}%
1224     }\par
1225     \vskip 2\baselineskip
1226     \fi
1227 </Spacer>
1228     {\leavevmode\subject@font{%
1229         \large\strut\ignorespaces\@subject\par\vskip 2\baselineskip}}%
1230     {\def\and{\}\csname @authorfont\endcsname{\large\@author}\par
1231     \vskip .5\baselineskip}}%
1232     {\titlefont{\LARGE\strut\ignorespaces\@title\par}}%
1233     {\@subtitlefont{%

```

```

1234         \large\vskip.5\baselineskip\strut\ignorespaces\@subtitle\par}}%
1235     \vfill
1236     {\csname @publisherfont\endcsname{\large\@publisher\par}}%
1237     {\csname @datefont\endcsname{\large\strut\ignorespaces\@date\par}}%
1238     }%
1239 </Spacer | Markus & 2)
1240 <*KIT)
1241     \setlength{\unitlength}{1mm}%
1242     \begin{picture}(0,0)
1243         \put(15,-12){%
1244             \line(1,0){\dimexpr\paperwidth-37mm\relax\@gobble}%
1245         }%
1246         \put(\dimexpr\paperwidth-22mm\@gobble,-19){\oval(14,14)[rt]}%
1247         \put(\dimexpr\paperwidth-15mm\@gobble,-19){%
1248             \line(0,-1){\dimexpr\paperheight-37mm\relax\@gobble}%
1249         }%
1250         \put(22,-\dimexpr\paperheight-18mm\relax\@gobble){%
1251             \line(1,0){\dimexpr\paperwidth-37mm\relax\@gobble}%
1252         }%
1253         \put(22,-\dimexpr\paperheight-25mm\relax\@gobble){\oval(14,14)[lb]}%
1254         \put(15,-\dimexpr\paperheight-25mm\relax\@gobble){%
1255             \line(0,1){\dimexpr\paperheight-37mm\relax\@gobble}%
1256         }%
1257     \end{picture}\par
1258     \vskip\dimexpr -\baselineskip+25mm\relax
1259     \hspace*{27mm}%
1260     \begin{minipage}[t][\dimexpr\paperheight-68mm\relax][t]
1261         {\dimexpr\paperwidth-54mm\relax}
1262         \raggedright\@titlehead\par
1263         \centering
1264         \vskip 25mm
1265         {\@titlepagefont\@title\par}%
1266         \vskip 20mm
1267         {\Large\@subject\par\fromname\par}
1268         \vskip 1cm
1269         {\huge\usenonemptytitleelement{author}\par}
1270         \vskip 1cm
1271         {\Large\presentationinformationKIT\par}
1272         \vskip 2cm
1273         {\Large
1274             \let\@tempa\refereename
1275             \def\@tempb{1}%
1276             \def\and{%
1277                 \\
1278                 \xdef\@tempb{\the\numexpr\@tempb+1\relax}%
1279                 \expandafter\ordinal\expandafter{\@tempb}~\@tempa: &
1280             }%
1281             \begin{tabular}{@{}lr@{}}
1282                 \refereename: & \@referee \\
1283                 \global\let\@tempa\advisorname\xdef\@tempb{1}%
1284                 \advisorname: & \@advisor \\
1285             \end{tabular}\par
1286         }
1287     \vfill

```

```

1288     {\large \durationname: \@duration\par}
1289 \end{minipage}
1290 \vskip 35mm
1291 \hspace*{27mm}\makebox[\dimexpr\paperwidth-56mm\relax]{%
1292   \tiny\@university\hfill\large\textbf{\@homepage}%
1293 }%
1294 </KIT>
1295 <*JT-Aufsätze>
1296   \centering
1297   \ifx\@author\@empty\else\@author\
1298     \begin{picture}(\title@rulewidth\@gobble,
1299       \dimexpr .3ex+1pt+\title@rulesep\relax\@gobble)
1300     \ifx\title@rulecolor\@empty\else
1301       \@ifundefined{color}{\color{\title@rulecolor}}%
1302     \fi
1303     \put(0,\dimexpr .15ex+.5pt+\title@rulesep\relax\@gobble){%
1304       \linethickness{.3ex}\line(1,0){\title@rulewidth\@gobble}%
1305     }%
1306     \put(0,0){%
1307       \linethickness{1pt}\line(1,0){\title@rulewidth\@gobble}%
1308     }%
1309   \end{picture}\[\baselineskip]
1310   \fi
1311   {\titlefont{\@title\par}}%
1312   \vfill
1313   \@publisher
1314 </JT-Aufsätze>
1315 <*JT-Geschichte>
1316   \centering
1317   \large{\@tpf@extra{\@author\unskip\strut}}\[\dp\strutbox]
1318   {\titlefont{\Huge\@title\par}}
1319   \vfill
1320   \begin{picture}(\title@rulewidth\@gobble,
1321     \dimexpr 4pt+1pt+\title@rulesep\relax\@gobble)
1322   \ifx\title@rulecolor\@empty\else
1323     \@ifundefined{color}{\color{\title@rulecolor}}%
1324   \fi
1325   \put(0,\dimexpr 2pt+.5pt+\title@rulesep\relax\@gobble){%
1326     \linethickness{1pt}\line(1,0){\title@rulewidth\@gobble}%
1327   }%
1328   \put(0,0){%
1329     \linethickness{4pt}\line(1,0){\title@rulewidth\@gobble}%
1330   }%
1331   \end{picture}\[\dp\strutbox]
1332   \@tpf@extra{\@publisher}%
1333   \ifx\@place\@empty\else
1334     \unskip\@tpf@extra{\strut}\[\dp\strutbox]\@tpf@extra{\@place}%
1335   \fi
1336 </JT-Geschichte>
1337 <*JT-Typography>
1338   \raggedright
1339   {\Large\MakeUppercase{\@author}\unskip\strut\[\baselineskip]}
1340   {\titlefont{\Huge\MakeUppercase{\@title}\unskip\strut}}
1341   {\@subtitlefont{\normalsize\MakeUppercase{\@subtitle}\unskip\strut}}

```

```

1342 \vfill
1343 {\normalsize\MakeUppercase{\@place}\ifx\@place\@empty\else\enskip\fi
1344 {\LARGE\MakeUppercase{\@date}}%
1345 \ifx\@publisher\@empty\else\unskip\strut\[\[1.5\baselineskip]
1346 \MakeUppercase{\@publisher}%
1347 \fi}
1348 </JT-Typography>
1349 <*UKoLa>
1350 \begin{tabular}[t]{@{}c@{}}
1351 \raisebox{\dimexpr\ht\strutbox-\height}{\@mainlogo}\
1352 \chair\
1353 \end{tabular}\hfill
1354 \begin{tabular}[r]{@{}c@{}}
1355 \raisebox{\dimexpr\ht\strutbox-\height}{\@secondlogo}\
1356 \end{tabular}\par
1357 \vspace{5\baselineskip}
1358 \centering
1359 {\LARGE\bfseries\titlefont{\@title\par}}%
1360 \vspace{5\baselineskip}
1361 {\Large\subject@font{\@subject\par}}%
1362 \vspace{\baselineskip}
1363 \presentationinformationUKoLa\par
1364 \vspace{5\baselineskip}
1365 \presentedbyname\[\[baselineskip]
1366 {\Large\csname @authorfont\endcsname{\usenonemptytitleelement{author}\par}}%
1367 \vfill
1368 \raggedright
1369 \@hangfrom{\advisorname: }\{\@advisor\par}%
1370 \newcommand*\test@male@female}[1][m]{%
1371 \global\advance\@tempcnta by\@ne
1372 \Ifstr{##1}{f}{\def\fe@male{female}}{\def\fe@male{male}}%
1373 \@hangfrom{\csname ordinal\fe@male\refereename\endcsname{\@tempcnta}: }%
1374 \def\and{\par\test@male@female}%
1375 }%
1376 \@tempcnta \z@
1377 \expandafter\test@male@female\@referee\par
1378 \vspace{3\baselineskip}
1379 \@place, \Ifstr{\indatename}{\}{\indatename\ }\@date\par
1380 </UKoLa>
1381 \end{%
1382 <DHBW | TU-DD | TU-HH | KIT> fullsizetitle}
1383 <*KOMAScript | Markus | Spacer | JT-Aufsätze | JT-Geschichte | JT-Typography | WWUM | UKoLa>
1384 titlepage}
1385 </KOMAScript | Markus | Spacer | JT-Aufsätze | JT-Geschichte | JT-Typography | WWUM | UKoLa>
1386 }

```

Some of the styles need additional string options for the back of the main title.
These are more structural than logical, so we do not define those globally!

```

uppertitleback (opt.)
  \uppertitleback 1387 <*KOMAScript | Markus | Spacer>
  \@uppertitleback 1388 \providecommand*\@uppertitleback{}
lowertitleback (opt.) 1389 \providecommand{\uppertitleback}[1]{\gdef\@uppertitleback{#1}}
  \lowertitleback 1390 \DefineFamilyKey[%
  \@lowertitleback

```

```

1391 <KOMAScript> KOMAScript%
1392 <Markus & 1> Markus-1%
1393 <Markus & 2> Markus-2%
1394 <Spacer> Spacer%
1395 <JT-Aufsaetze> JT-Aufsaetze%
1396 <JT-Geschichte> JT-Geschichte%
1397 <JT-Geschichte> JT-Typography%
1398 ]{title}{uppertitleback}{\uppertitleback{#1}\FamilyKeyStateProcessed}
1399 \providecommand*{\@lowertitleback}{}
1400 \providecommand{\lowertitleback}[1]{\gdef\@lowertitleback{#1}}
1401 \DefineFamilyKey[%
1402 <KOMAScript> KOMAScript%
1403 <Markus & 1> Markus-1%
1404 <Markus & 2> Markus-2%
1405 <Spacer> Spacer%
1406 <JT-Aufsaetze> JT-Aufsaetze%
1407 <JT-Geschichte> JT-Geschichte%
1408 <JT-Geschichte> JT-Typography%
1409 ]{title}{lowertitleback}{\lowertitleback{#1}\FamilyKeyStateProcessed}
1410 </KOMAScript | Markus | Spacer>

```

`\makemaintitleback` Only some of the styles define this:

```

1411 <*KOMAScript | Markus | Spacer | JT-Aufsaetze | JT-Geschichte | JT-Typography>
1412 \renewcommand*{\makemaintitleback}{%
1413   \begin{titlepage}
1414     \setlength{\parskip}{\z@}%
1415     \setlength{\parindent}{\z@}%
1416     \setlength{\parfillskip}{\z@\@plus 1fil}%
1417     \begin{minipage}[t]{\textwidth}
1418       \@titlepagefont{\@uppertitleback}%
1419     \end{minipage}\par
1420     \vfill
1421     \begin{minipage}[b]{\textwidth}
1422       \@titlepagefont{\@lowertitleback}%
1423     \end{minipage}
1424   \end{titlepage}
1425 }
1426 </KOMAScript | Markus | Spacer | JT-Aufsaetze | JT-Geschichte | JT-Typography>
1427 <*TU-HH>
1428 \renewcommand*{\makemaintitleback}{%
1429   \begin{titlepage}
1430     \setlength{\parskip}{\z@}%
1431     \setlength{\parindent}{\z@}%
1432     \setlength{\parfillskip}{\z@\@plus 1fil}%
1433     \vspace*{\fill}
1434     \iffinal
1435     \@tempcnta\z@
1436     \def\and{%
1437       \par\advance\@tempcnta by\@ne
1438       \hangfrom{%
1439         \expandafter\ordinal\expandafter{\the\@tempcnta}\refereename:\enskip
1440       }%
1441     }\and\@referee
1442   \fi

```

```

1443 \vskip 1cm
1444 \iffinal
1445 \@hangfrom{\oralexaminationdatename:\enskip}{\@oralexaminationdate}%
1446 \fi
1447 \end{titlepage}
1448 }
1449 </TU-HH>
1450 <*WWUM>
1451 \renewcommand*\makemaintitleback{%
1452 \begin{titlepage}
1453 \setlength{\parfillskip}{\z@\@plus 1fil}%
1454 \vspace*{\fill}
1455 \noindent
1456 \@tempcnta\z@
1457 \def\arraystretch{2}%
1458 \newcommand*\test@malefemale}[1][m]{%
1459 \global\advance\@tempcnta by\@ne
1460 \Ifstr{##1}{f}{\def\fe@male{female}}{\def\fe@male{male}}%
1461 \csname \fe@male ordinal\endcsname{\@tempcnta}\space
1462 \csname \fe@male refereename\endcsname: &
1463 \def\and{\\test@malefemale}%
1464 }%
1465 \begin{tabular}{@{}ll@{}}
1466 \chairmanname: & \@professor \\
1467 \expandafter\test@malefemale
1468 \@referee \\
1469 \oralexaminationdatename: & \@oralexaminationdate
1470 \ifx\examinationdatename\@empty\else
1471 \\examinationdatename: &
1472 \fi
1473 \\
1474 \end{tabular}
1475 \end{titlepage}
1476 }
1477 </WWUM>

```

Some of the styles need additional string options for the pre title. These are more structural than logical, so we do not define those globally!

`extratitle (opt.)`

```

\extratitle 1478 <*KOMAScript | Markus & 2 | Spacer | JT-Aufsaeetze | JT-Geschichte | JT-Typography>
\@extratitle 1479 \providecommand*\@extratitle{}
1480 \providecommand{\extratitle}[1]{\gdef\@extratitle{#1}}
1481 \DefineFamilyKey[%
1482 <KOMAScript> KOMAScript%
1483 <Markus & 2> Markus-2%
1484 <Spacer> Spacer%
1485 <JT-Aufsaeetze> JT-Aufsaeetze%
1486 <JT-Geschichte> JT-Geschichte%
1487 <JT-Typography> JT-Typography%
1488 ]{title}{extratitle}{\extratitle{#1}\FamilyKeyStateProcessed}
1489 </KOMAScript | Markus & 2 | Spacer | JT-Aufsaeetze | JT-Geschichte | JT-Typography>

```

```

\makeprettitle Only some styles have pre titles:
\makeprettitleback 1490 <*KOMAScript | Markus & 2 | Spacer | JT-Aufsaeetze | JT-Geschichte | JT-Typography)
1491 \renewcommand*\makeprettitle}{%
1492 \ifx\@extratitle\@empty\else
1493 \begin{titlepage}
1494 \noindent\@extratitle
1495 \end{titlepage}
1496 \fi
1497 }%
1498 </KOMAScript | Markus & 2 | Spacer | JT-Aufsaeetze | JT-Geschichte | JT-Typography)
1499 <*Markus & 1)
1500 \renewcommand*\makeprettitle}{%
1501 \ifx\@publisher\@empty\else
1502 \begin{titlepage}
1503 \raggedleft
1504 {\@titlepagefont{%
1505 \large\strut\ignorespaces\@publisher\par}}%
1506 \end{titlepage}
1507 \fi
1508 }
1509 </Markus & 1)
1510 <*WWUM)
1511 \renewcommand*\makeprettitle}{%
1512 \begin{fullsizetitle}
1513 \@titlepagefont
1514 \vspace*{.33\vsiz}%
1515
1516 \centering
1517 \usenonemptytitleelement{author}\[1ex]
1518 \usenonemptytitleelement{title}\[1ex]
1519 \the\year
1520 \end{fullsizetitle}
1521 }
1522 </WWUM)
1523 <*KOMAScript | Markus & 2 | Spacer | JT-Aufsaeetze | JT-Geschichte | JT-Typography)
1524 \renewcommand*\makeprettitleback}{%
1525 \ifx\@extratitle\@empty\else\begin{titlepage}\null\end{titlepage}\fi
1526 }
1527 </KOMAScript | Markus & 2 | Spacer | JT-Aufsaeetze | JT-Geschichte | JT-Typography)
1528 <*Markus & 1)
1529 \renewcommand*\makeprettitleback}{%
1530 \ifx\@author\@empty\else
1531 \ifx\@publisher\@empty\begin{titlepage}\end{titlepage}\fi
1532 \begin{titlepage}
1533 \raggedleft
1534 {\@titlepagefont{%
1535 \large\null\vskip 2\baselineskip
1536 \LARGE\strut{\def\and{\hspace{1em}}\linebreak[3]}%
1537 \csname @authorfont\endcsname{\large\ignorespaces\@author\par}}}%
1538 \end{titlepage}
1539 \fi
1540 }
1541 </Markus & 1)
1542 <*WWUM)

```



```

1543 \renewcommand*\makeprettitleback}{%
1544 \if@twoside\begin{titlepage}\null\end{titlepage}\fi
1545 }
1546 </WWUM>

```

`\makeposttitle` And only some styles provides one more title page with dedication.

```

\makeposttitleback 1547 <*KOMAScript | Markus | Spacer | JT-Aufsätze | JT-Geschichte | JT-Typography>
1548 \renewcommand*\makeposttitle}{%
1549 \ifx\@dedication\@empty\else
1550 \begin{titlepage}
1551 \null\vfill
1552 {\centering\csname @dedicationfont\endcsname{\@dedication \par}}%
1553 \vskip \z@ \@plus 3fill
1554 \end{titlepage}
1555 \fi
1556 }
1557 \renewcommand*\makeposttitleback}{%
1558 \ifx\@dedication\@empty\else\begin{titlepage}\null\end{titlepage}\fi
1559 }
1560 </KOMAScript | Markus | Spacer | JT-Aufsätze | JT-Geschichte | JT-Typography>

```

4.4 The Examples and the Manual

```

1561 \documentclass[a4paper,pagesize]{scrbook}
1562 \usepackage[ngerman]{babel}
1563 \usepackage{iftex}
1564 \iftutex
1565 <*TU-HH | TU-DD>
1566 \usepackage{fontspec}
1567 \setmainfont{TeX Gyre Termes}
1568 \setsansfont{TeX Gyre Heros}
1569 </TU-HH | TU-DD>
1570 \else
1571 \usepackage[T1]{fontenc}
1572 \usepackage{lmodern}
1573 <TU-HH | TU-DD>\usepackage{mathpazo}
1574 <TU-HH | TU-DD>\usepackage[scaled]{helvet}
1575 \fi
1576 <JT-Geschichte>\usepackage{microtype}
1577 <DHBW | Spacer | KIT | UKoLa>\usepackage[demo]{graphicx}% remove option demo if you have the l
1578 \usepackage{xcolor}
1579 <JT-Geschichte | JT-Typography>\colorlet{RED}{red}% because of \MakeUppercase{\textcolor{red}{.
1580 \usepackage{uni-titlepage}
1581 \begin{document}
1582 <*DHBW>
1583 \TitlePageStyle{DHBW}
1584 \makeatletter\providecommand*\@titlepagefont{\normalfont\sffamily}\makeatother
1585 \setkomafont{subject}{\sffamily\bfseries}
1586 \maketitle[%
1587 titlefont=\sffamily,
1588 mainlogo=\textcolor{red}{%
1589 % You may add a company logo here!
1590 % NOTE: The original logo has a large white border!

```

```

1591 \includegraphics[width=57mm,height=27mm]%
1592 {DHBW_d_MOS_195x95_rgb_300.jpg}%
1593 }},
1594 % You may additionally change titlehead. The original definition of
1595 % titlehead is:
1596 titlehead={\hspace*{\fill}\usetitleelement{mainlogo}},
1597 title=\textcolor{red}{Bachelorarbeitsthema},
1598 subject=\textcolor{red}{BACHELORARBEIT},
1599 academicgrade=\textcolor{red}{Bachelor of Engineering},
1600 discipline=\textcolor{red}{Studiengang},
1601 place={Baden-Württemberg \textcolor{red}{Stadt}},
1602 student=\textcolor{red}{Vorname Nachname},
1603 duration=\textcolor{red}{12 Wochen},
1604 matriculationnumber=\textcolor{red}{Matrikelnummer},
1605 course=\textcolor{red}{Kurskürzel},
1606 company=\textcolor{red}{Firmenname, Stadt},
1607 advisor=\textcolor{red}{Titel Vorname Nachname},
1608 referee=\textcolor{red}{Titel Vorname Nachname},
1609 date=\textcolor{red}{Abgabedatum}
1610 ]
1611 </DHBW>
1612 <*TU-DD>
1613 \TitlePageStyle{TU-DD}
1614 \maketitle[%
1615 title=\textcolor{red}{Titel im Stil \texttt{TU-DD}},
1616 university=\textcolor{red}{%
1617 Technische\nobreakspace Universit\at\nobreakspace Dresden},%
1618 faculty=\textcolor{red}{Fakultät Wirtschaftswissenschaften},
1619 chair=\textcolor{red}{SAP-Stiftungslehrstuhl für\
1620 Entrepreneurship und Innovation},
1621 professor=\textcolor{red}{Prof.\,Dr.\,Michael Schefcyk},
1622 % subject=diploma, % one of: project, seminar, studentresearch,
1623 % % diploma, degree, master, bachelor, or ...
1624 subject=\textcolor{red}{Seminararbeit\ (bzw. Diplomarbeit)},% ... direct value
1625 student=\textcolor{red}{Vorname und Name},
1626 discipline=\textcolor{red}{Studienrichtung},
1627 matriculationnumber=\textcolor{red}{Matrikel-Nr.},
1628 advisor=\textcolor{red}{(mit akadem. Grad, Vor- und Zuname)},
1629 date=\textcolor{red}{(Datum der Abgabe)}
1630 ]
1631
1632 \TitleOptions{pagenumber=1,blackborder}% same with 'Trauerrand'
1633 \maketitle% everything else, like above
1634 </TU-DD>
1635 <*KOMAScript>
1636 \TitlePageStyle[pagenumber=1]{KOMAScript}
1637 \maketitle[
1638 extratitle=\textcolor{red}{Das ist ein Schmutztitel im Stil \texttt{KOMAScript}},
1639 titlehead=\textcolor{red}{Den Kopfbereich kann man auf diese Weise füllen.},
1640 subject=\textcolor{red}{Eine Klassifizierung der Arbeit},
1641 title=\textcolor{red}{Titel im Stil \texttt{KOMAScript}},
1642 subtitle=\textcolor{red}{Untertitel},
1643 publisher=\textcolor{red}{Einen Verlag kann man ebenfalls angeben},
1644 uppertitleback=\textcolor{red}{Oberer Bereich der Rückseite des Haupttitels im Stil

```

```

1645 \texttt{KOMAScript}.},
1646 lowertitleback=\textcolor{red}{Unterer Bereich der Rückseite des Haupttitels im Stil
1647 \texttt{KOMAScript}.},
1648 dedication=\textcolor{red}{Eine Widmung im Stil \texttt{KOMAScript}}
1649 ]
1650 </KOMAScript>
1651 <*TU-HH>
1652 \TitlePageStyle[pagenummer=1]{TU-HH}
1653 \maketitle[%
1654 final,
1655 title=\textcolor{red}{Titel im Stil \texttt{TU-HH}},
1656 university=\textcolor{red}{Technischen Universität Hamburg-Harburg},
1657 subject=degree,
1658 author=\textcolor{red}{Vorname und Name},
1659 academicgrade=\textcolor{red}{Doktor der Naturwissenschaften (Dr.\,rer.\,nat\,)},
1660 place=\textcolor{red}{(Geburtsort)},
1661 date=\textcolor{red}{(aktuelles Jahr)},
1662 referee=\textcolor{red}{Name des ersten Gutachters\protect\and Name des zweiten
1663 Gutachters},
1664 oralexaminationdate=\textcolor{red}{29. Februar 2009}
1665 ]
1666 </TU-HH>
1667 <*Markus | Spacer>
1668 % Maybe we should define one more option for this:
1669 \setkomafont{subject}{\normalfont\sffamily}% because of KOMA-Script class
1670 \setkomafont{title}{\normalfont\sffamily}% because of KOMA-Script class
1671 <*1>
1672 \TitlePageStyle[pagenummer=1]{Markus-1}
1673 \maketitle[%
1674 titlepagefont={\normalfont\sffamily},% to show is without KOMA-Script class
1675 title=\textcolor{red}{Titel im Stil \texttt{Markus-1}},
1676 subject=\textcolor{red}{Eine Klassifizierung der Arbeit},
1677 subtitle=\textcolor{red}{Untertitel},
1678 publisher=\textcolor{red}{Verlag},
1679 uppertitleback=\textcolor{red}{Oberer Bereich der Rückseite des Haupttitels
1680 im Stil \texttt{Markus-1}.},
1681 lowertitleback=\textcolor{red}{Unterer Bereich der Rückseite des Haupttitels
1682 im Stil \texttt{Markus-1}.},
1683 dedication=\textcolor{red}{Eine Widmung im Stil \texttt{Markus-1}},
1684 author=\textcolor{red}{Markus~Kohm\protect\and Sonst~Jemand}
1685 ]
1686 </1>
1687 <*2 | Spacer>
1688 <2> \TitlePageStyle[pagenummer=1]{Markus-2}
1689 <Spacer> \TitlePageStyle[pagenummer=1]{Spacer}
1690 \maketitle[%
1691 rulewidth=2pt,
1692 extratitle=\textcolor{red}{Das ist ein Schmutztitel im Stil \texttt{%
1693 <2> Markus-2}},
1694 <Spacer> Spacer}},
1695 <*Spacer>
1696 titlehead=\textcolor{red}{\includegraphics{Logo}},
1697 </Spacer>
1698 title=\textcolor{red}{Titel im Stil \texttt{%

```

```

1699 <2>      Markus-2}},
1700 <Spacer>      Spacer}},
1701  subject=\textcolor{red}{Eine Klassifizierung der Arbeit},
1702  subtitle=\textcolor{red}{Untertitel},
1703  publisher=\textcolor{red}{Verlag},
1704  uppertitleback=\textcolor{red}{Oberer Bereich der Rückseite des Haupttitels
1705    im Stil \texttt{%
1706 <2>      Markus-2}.},
1707 <Spacer>      Spacer}.},
1708  lowertitleback=\textcolor{red}{Unterer Bereich der Rückseite des Haupttitels
1709    im Stil \texttt{%
1710 <2>      Markus-2}.},
1711 <Spacer>      Spacer}.},
1712  dedication=\textcolor{red}{Eine Widmung im Stil \texttt{%
1713 <2>      Markus-2}},
1714 <Spacer>      Spacer}},
1715  author=\textcolor{red}{Markus~Kohm}
1716 ]
1717 </2 | Spacer>
1718 </Markus | Spacer>
1719 <*KIT>
1720 \TitlePageStyle{KIT}
1721 \maketitle[%
1722  mainlogo={\textcolor{red}{%
1723    \includegraphics[width=40mm,height=18.5mm]{KITLogo_RGB}}},%
1724  % You may additionally change titlehead. Original definition of titlehead
1725  % is:
1726  titlehead={\usetitleelement{mainlogo}\hspace*{\fill}},%
1727  title=\textcolor{red}{Titel der Arbeit\\im Stil \texttt{KIT}},%
1728  subject=\textcolor{red}{Klassifizierung der Arbeit},%
1729  author=\textcolor{red}{Markus~Kohm},%
1730  faculty=\textcolor{red}{Fakultät für Informatik},%
1731  chair=\textcolor{red}{%
1732    Institute for Program Structures\\and Data Organization (IPA)},%
1733  advisor={\textcolor{red}{Titel Vorname Nachname}\and
1734    \textcolor{red}{Titel Vorname Nachname}},%
1735  referee={\textcolor{red}{Titel Vorname Nachname}\and
1736    \textcolor{red}{Titel Vorname Nachname}},%
1737  duration=\textcolor{red}{XX. Monat 20XX -- XX. Monat 20XX},%
1738  university=\textcolor{red}{\KITlongname},%
1739  homepage=\textcolor{red}{\KITurl}%
1740 ]
1741 </KIT>
1742 <*JT-Aufsätze>
1743 \TitlePageStyle{JT-Aufsätze}
1744 \maketitle[%
1745  % There are only three official elements:
1746  author={\textcolor{red}{Markus Kohm}},%
1747  title={\textcolor{red}{Titel der Arbeit angelehnt an Jan Tschicholds
1748    ausgewählte Aufsätze über Fragen der Gestalt des Buches und der
1749    Typographie}},
1750  titlefont=\normalfont,% You may change the font of the main title
1751  publisher={\textcolor{red}{Der Verlag}}
1752  % Nevertheless, you may use extratitle, lowertitleback and uppertitleback.

```

```

1753 % See Markus-2 for more information about those.
1754 ]
1755 </JT-Aufsätze>
1756 <*JT-Geschichte>
1757 \TitlePageStyle{JT-Geschichte}
1758 \maketitle[%
1759 % There are only four official elements:
1760 author={\textcolor{red}{Markus Kohm}},%
1761 title={\textcolor{red}{Titel der Arbeit angelehnt an Jan Tschicholds
1762     Geschichte der Schrift in Bildern}},
1763 titlefont=\itshape,% You may change the font of the main title
1764 publisher={\textcolor{red}{Der Verlag in seiner Langform}},
1765 place={\textcolor{red}{Der Ort}}
1766 % Nevertheless, you may use extratitle, lowertitleback and uppertitleback.
1767 % See Markus-2 for more information about those.
1768 ]
1769 </JT-Geschichte>
1770 <*JT-Typography>
1771 \TitlePageStyle{JT-Typography}
1772 \maketitle[%
1773 % There are only four official elements:
1774 author={\textcolor{red}{Markus Kohm}},%
1775 title={\textcolor{red}{Titel der Arbeit}},
1776 subtitle={\textcolor{red}{angelehnt an the new Typography}},
1777 publisher={\textcolor{red}{Veröffentlicht für einen Verlag oder auch nicht}},
1778 place={\textcolor{red}{Der Ort}},
1779 date={\textcolor{red}{2012}}
1780 % Nevertheless, you may use extratitle, lowertitleback and uppertitleback.
1781 % See Markus-2 for more information about those.
1782 ]
1783 </JT-Typography>
1784 <*WWUM>
1785 \TitlePageStyle{WWUM}
1786 \renewcaptionname{ngerman}{\examinationdatename}{Tag der Promotion}
1787 %\renewcaptionname{ngerman}{\examinationdatename}{}
1788 %\renewcaptionname{ngerman}{\chairmanname}{Dekan}
1789 %\renewcaptionname{ngerman}{\chairmanname}{Dekanin}
1790 \maketitle[%
1791 title={\textcolor{red}{Titel der Arbeit}},
1792 subject={\textcolor{red}{Inaugural-Dissertation}},
1793 academicgrade={\textcolor{red}{Doktorgrades}},
1794 discipline={\textcolor{red}{Physik}},
1795 sience={\textcolor{red}{Naturwissenschaften}},
1796 chair={\textcolor{red}{Experimentelle Physik}},
1797 faculty={\textcolor{red}{Mathematisch-Naturwissenschaftlichen}},
1798 author={\textcolor{red}{Mein Name}},
1799 place={\textcolor{red}{Geburtsort}},
1800 referee={\textcolor{red}{Peter Mustermann}\and
1801 [f]\textcolor{red}{Petra Musterfrau}},
1802 professor={\textcolor{red}{Klaus Naseschwarz}}
1803 ]
1804 </WWUM>
1805 <*UKoLa>
1806 \TitlePageStyle{UKoLa}

```

```

1807 \maketitle[%
1808   titlefont=\sffamily,
1809   mainlogo=\textcolor{red}{\{%
1810     \includegraphics[height=10mm,width=63mm]%
1811       {uni-koblenz-landau}%
1812   }},
1813   chair=\textcolor{red}{Nummer des Instituts:
1814     Name des Instituts},
1815   secondlogo=\textcolor{red}{Optionales weiteres Logo},
1816   title=\textcolor{red}{Titel der Studien-, Bachelor-, Master- oder Diplomarbeit},
1817   subject=\textcolor{red}{Diplomarbeit},
1818   academicgrade=\textcolor{red}{Diplom-Informatikers},
1819   discipline=\textcolor{red}{Name des Studiengangs},
1820   place={\textcolor{red}{Koblenz}},
1821   author=\textcolor{red}{Vorname und Nachname des Absolventen / der
1822     Absolventin},
1823   advisor=\textcolor{red}{Title{
1824     Vorname{
1825       Name,
1826       Institut, Fachbereich innerhalb der Universität /
1827       Institution außerhalb der Universität},
1828   referee={\textcolor{red}{Title{
1829     Vorname{
1830       Name,
1831       Institut, Fachbereich innerhalb der Universität /
1832       Institution außerhalb der Universität}}%
1833   \and[f]\textcolor{red}{Title{
1834     Vorname{
1835       Name,
1836       Institut, Fachbereich innerhalb der Universität /
1837       Institution außerhalb der Universität}}%
1838   },%
1839   date=\textcolor{red}{Abgabemonat},
1840 ]
1841
1842 </UKoLa>
1843 \end{document}

1844 <!*README>
1845 \documentclass{ltxdoc}
1846 \IfPackageAtLeastTF{doc}{2022/01/01}{\{%
1847   \errhelp{To avoid this error message, use doc.sty v3 instead of v2}}%
1848   \errmessage{Package 'doc' is to old!}%
1849 }
1850 \usepackage[english]{babel}
1851 \usepackage{xltabular}
1852 \usepackage{ragged2e}
1853 \usepackage{booktabs}
1854 \usepackage{graphicx}
1855 \usepackage{hologo}
1856 \newcommand*{NewIn}[1]{\leavevmode\marginpar{\footnotesize\hfill added in #1}}
1857 \newcommand*{ChangedIn}[1]{\leavevmode\marginpar{\footnotesize\hfill changed in
1858   #1}}
1859 \NewDocElement[macrolike = true,
1860               toplevel = false,

```

```

1861             idxtype = ,
1862             idxgroup = User commands,
1863             printtype =
1864             ]{InterfaceMacro}{imacro}
1865 \NewDocElement[macrolike = false,
1866             toplevel = false,
1867             idxtype = opt.,
1868             idxgroup = Title options,
1869             printtype = \textit{opt.}
1870             ]{Option}{option}
1871 \NewDocumentCommand{\pkg}{s0{https://www.ctan.org/pkg/#3}m}{%
1872 \IfBooleanTF{#1}{\@gobble}{%
1873 \csname tl_if_blank:nTF\endcsname{#2}{\@gobble}{\href}%
1874 }%
1875 {#2}{\textsf{#3}}}%
1876 }
1877 \newcommand*{\File}{\texttt}
1878 \CodelineIndex
1879 \RecordChanges
1880 \EnableCrossrefs
1881 \GetFileInfo{uni-titlepage.drv}
1882 \begin{document}
1883 \title{More Titlepage Styles with Package \pkg{uni-titlepage}}
1884 \author{\href{mailto:komascript@gmx.info}{Markus Kohm}}
1885 \date{\fileversion{} \filedate}
1886 \maketitle
1887 \begin{abstract}
1888 \langle!README\rangle
1889 \langle*README\rangle
1890 -----
1891
1892 This work may be distributed and/or modified under the conditions of
1893 the LaTeX Project Public License, version 1.3c of the license.
1894 The latest version of this license is in
1895 http://www.latex-project.org/lppl.txt
1896 and version 1.3c or later is part of all distributions of LaTeX
1897 version 2005/12/01 or later.
1898
1899 This work has the LPPL maintenance status "maintained".
1900
1901 The Current Maintainer and author of this work is Markus Kohm.
1902
1903 -----
1904
1905 # ABSTRACT
1906
1907 \langle/README\rangle
1908 Creation of title pages is something most authors should not have to do.
1909 But reality is not perfect, so a lot of authors have to do it. In 2009
1910 \langle!README\rangle KOMA started the title page project at \url{https://komascript.de/titlepage}
1911 \langle README\rangle KOMA started the title page project at <https://komascript.de/titlepage>
1912 to collect real title pages and implement them with a well defined interface.
1913 \langle!README\rangle In 2021 the project has been moved to \url{https://github.com/komascript/uni-titlepage}
1914 \langle README\rangle In 2021 the project has been moved to <https://github.com/komascript/uni-titlepage>

```

1915 and renamed.

1916

1917 Now, changing from one title page style to another would be very
1918 simple. Nevertheless implementation of a new title page style may be still
1919 difficult. But maybe the guys of the title page project would help you. Just
1920 ask!

1921 `<*README>`

1922

1923 # Unpacking and Installation for Developers and Distributors

1924

1925 To unpack and install all files, you can download the source from github
1926 and then run:

1927

1928 `l3build install`

1929

1930 Afterwards you can build the manual and the PDFs of the examples using:

1931

1932 `l3build doc`

1933

1934 As an alternative you can use the CTAN source distribution. This already
1935 contains the user manual and the PDFs of the example files. So you only have
1936 to run

1937

1938 `tex uni-titlepage.dtx`

1939

1940 to generate the package file ‘uni-titlepage.sty’, the title definition files
1941 ‘title-*.def’ and the example titlepages ‘titlepage-*.tex’.

1942

1943 Please note, the ‘title-*.def’ files are run-time files. Together with
1944 ‘uni-titlepage.sty’ they have to be placed in ‘tex/latex/uni-titlepage’ inside
1945 a TDS tree. All files ‘titlepage-*.tex’ and ‘titlepage-*.pdf’ as well as
1946 ‘uni-titlepage.pdf’ are part of the documentation and should be placed in
1947 ‘doc/latex/uni-titlepage/’ of the TDS tree.

1948

1949 # Unpacking and Installation for Users

1950

1951 Users can use the installation described at [Unpacking and Installation for
1952 Developers and
1953 Distributors] (#unpacking-and-installation-for-developers-and-distributors).
1954 However, if your TeX distributor already distributes a ready for installation
1955 package, you do not need and should not create files and copy them
1956 yourself. Just use the package manager of your TeX distribution to install the
1957 package.

1958

1959 # How to Contribute

1960

1961 If you have made a title definition that is not specific for a single project
1962 but could be of interest for other users, you can either

1963

1964 * make your own ‘uni-titlepage-F00’ package with its own manual and [upload it
1965 to ctan](<https://www.ctan.org/upload>),
1966 * contribute in adding it to ‘uni-titlepage’.

1967

1968 The first option has the advantage, that you are free. There won’t be any code

1969 reviews by the ‘uni-titlepage’ developers. You don’t need to use the same
1970 coding style. There is not need to accept the license of ‘uni-titlepage’
1971 etc. But in this case you have to take care to keep it compatible with future
1972 releases of ‘uni-titlepage’ and it will not be presented in the
1973 ‘uni-titlepage’ manual.
1974
1975 The second option has the advantage, that after accepting your code, the
1976 ‘uni-titlepage’ developers will try to keep it working even if they change
1977 ‘uni-titlepage’. But there are several restrictions to your code, before it
1978 will be accepted. For example, you should always try to use general options,
1979 if possible. *Static text* (not handled by options) should be configurable via
1980 ‘\newcaptionname’, ‘\providcaptionname’ and ‘\renewcaptionname’ and should be
1981 available at least in English and German (but if we can, we help in
1982 translating them). The coding style and quality is also a criterion.
1983
1984 </README>
1985 <!*README>
1986 \end{abstract}
1987 \DocInput{uni-titlepage.dtx}
1988 \end{document}
1989 </!README>

Index

Numbers written in italic refer to the page where the corresponding entry is described; numbers underlined refer to the code line of the definition; numbers in roman refer to the code lines where the entry is used.

	Symbols		
\" 516, 517, 527, 529, 601, 611, 736, 804, 811, 816, 913, 914, 917, 924, 1617	\@dedication .. 295, 1549, 1552, 1558	1492, 1494, 1525
\, 1194, 1621, 1659	\@discipline . 284, 1148	\@faculty ... 257, 1134
\@ 361	\@duration	\@firstofone ... 97, 375
\@academicgrade	... 285	.. 252, 1076, 1288	\@fnsymbol
\@advisor	287, 1284, 1369	\@empty	905
\@author	. 250, 1104, 1147, 1230, 1297, 1317, 1339, 1530, 1537	123, 137, 316, 725, 732, 739, 910, 922, 938, 960, 965, 973, 976, 998, 1001, 1006, 1022, 1034, 1039, 1086, 1094, 1100, 1193, 1210, 1221, 1297, 1300, 1322, 1333, 1343, 1345, 1470, 1492, 1501, 1525, 1530, 1531, 1549, 1558	1244, 1246, 1247, 1248, 1250, 1251, 1253, 1254, 1255, 1298, 1299, 1303, 1304, 1307, 1320, 1321, 1325, 1326, 1329, 1872, 1873
\@chair	... 258, 767, 772, 777, 1136, 1352	\@evenhead	\@gobble
\@company 254	1018	95,
\@course 253	\@extratitle .. 1478,	1244, 1246, 1247, 1248, 1250, 1251, 1253, 1254, 1255, 1298, 1299, 1303, 1304, 1307, 1320, 1321, 1325, 1326, 1329, 1872, 1873
\@current 227, 237		\@hangfrom ... 1369, 1373, 1438, 1445
\@currname	... 227, 237		\@homepage 246, 973, 1292
\@date	... 251, 1073, 1108, 1160, 1181, 1204, 1237, 1344, 1379		\@ifundefined
			.. 1211, 1301, 1323
			\@lowertitleback ..
		 1387, 1422
			\@mainlogo 292, 938, 961, 976, 999, 1351

<code>\@makefnmark</code> .. 906, 907	1200, 1232,	1173, 1175,
<code>\@matriculationnumber</code>	1265, 1311,	1176, 1178,
..... 286, 1149	1318, 1340, 1359	1179, 1185,
<code>\@nameuse</code> 305	<code>\@titlehead</code> ... 243,	1187, 1189,
<code>\@ne</code> 85, 539,	960, 998, 1060,	1191, 1192,
555, 574, 590,	1086, 1088,	1193, 1230,
1371, 1437, 1459	1221, 1223, 1262	1277, 1282,
<code>\@oddhead</code> .. 1014, 1018	<code>\@titlepagefont</code> ...	1284, 1297,
<code>\@oldmakefnmark</code> 906, 907 330, 965,	1309, 1317,
<code>\@oralexaminationdate</code>	966, 1001, 1002,	1331, 1334,
.. 294, 1445, 1469	1006, 1007,	1339, 1340,
<code>\@place</code> 289, 725, 732,	1015, 1022,	1341, 1345,
739, 922, 1160,	1023, 1026,	1351, 1352,
1193, 1333,	1028, 1039,	1355, 1365,
1334, 1343, 1379	1040, 1055,	1463, 1466,
<code>\@plus</code> 1053,	1265, 1418,	1468, 1471,
1109, 1416,	1422, 1504,	1473, 1517,
1432, 1453, 1553	1513, 1534, 1584	1518, 1619,
<code>\@professor</code> .. 259, 1137, 1466	<code>\@tpf@extra</code>	1624, 1727, 1732
<code>\@publisher</code> ... 290,	... 1026, 1029,	<code>\@</code> 1379
1110, 1236,	1317, 1332, 1334	
1313, 1332,	<code>\@university</code> 256, 910,	A
1345, 1346,	1081, 1132, 1292	<code>\advance</code> 173,
1501, 1505, 1531	<code>\@uppertitleback</code> ..	1371, 1437, 1459
<code>\@referee</code> 288, 1282,	.. 1388, 1389, 1418	<code>\advanve</code> 171
1377, 1441, 1468	<code>\@uppertitlebacke</code> 1387	<code>\and</code> 1230, 1276,
<code>\@restonecolfalse</code> . 121	<code>\@usetitleelement@error</code>	1374, 1436,
<code>\@restonecoltrue</code> .. 119 298	1441, 1463,
<code>\@secondlogo</code> . 293, 1355	<code>\@</code> 703, 704, 705, 709,	1536, 1662,
<code>\@science</code> 283	710, 711, 715,	1684, 1733,
<code>\@spaces</code> 620	716, 717, 722,	1735, 1800, 1833
<code>\@subject</code> 260,	723, 724, 729,	<code>\arraystretch</code> 1457
748, 755, 762,	730, 731, 736,	<code>\askforoverwritefalse</code>
1094, 1095,	737, 738, 744, 11
1140, 1199,	745, 746, 747,	<code>\AtBeginDocument</code> .. 377
1229, 1267, 1361	751, 752, 753,	<code>\atthename</code> 402
<code>\@subtitle</code>	754, 758, 759,	
255, 1100, 1171,	760, 761, 766,	B
1202, 1234, 1341	767, 771, 772,	<code>\baselineskip</code> . 214,
<code>\@subtitlefont</code>	776, 777, 782,	722, 724, 729,
.... 349, 1100,	783, 784, 785,	731, 736, 738,
1201, 1233, 1341	786, 791, 792,	1070, 1114,
<code>\@tempa</code> ... 357, 363,	793, 794, 795,	1151, 1158,
1274, 1279, 1283	800, 801, 803,	1199, 1202,
<code>\@tempb</code>	804, 1070, 1076,	1225, 1229,
1278, 1279, 1283	1078, 1079,	1231, 1234,
<code>\@tempcnta</code> 1371, 1373,	1080, 1132,	1258, 1309,
1376, 1435,	1134, 1136,	1339, 1345,
1437, 1439,	1137, 1139,	1357, 1360,
1456, 1459, 1461	1140, 1144,	1362, 1364,
<code>\@thanks</code> 1113	1147, 1148,	1365, 1378, 1535
<code>\@title</code> 249,	1149, 1150,	<code>\batchfile</code> 1
1139, 1170,	1153, 1156,	<code>\begin</code> 167,
	1170, 1171,	198, 1046, 1059,

<code>\ordinalfemalecorrectorname</code>	861	<code>\presentationinformationUKoLa</code>	702, 708, 714, 1363	Q	<code>\quad</code>	1145, 1154
<code>\oval</code>	1246, 1253	<code>\protect</code> . . .	1662, 1684	R		
		<code>\providecaptionname</code>	413, 415,	<code>\raggedleft</code> .	1503, 1533
P		<code>\PackageError</code>	417, 419, 422,	<code>\raggedright</code> ..	201,
				424, 426, 428,		1142, 1197,
				431, 433, 435,		1207, 1219,
				437, 439, 441,		1262, 1338, 1368
				443, 445, 447,	<code>\raisebox</code>	1209,
				450, 453, 456,		1222, 1351, 1355
<code>\PackageInfo</code>	104			458, 460, 462,	<code>\RecordChanges</code> . . .	1879
<code>\PackageNotLoadedError</code>	618, 631			464, 466, 469,	<code>\relax</code>	249, 250,
<code>\PackageWarning</code>	176, 221			471, 473, 475,		251, 255, 381,
<code>\paperheight</code>				477, 479, 481,		630, 681, 690,
				483, 485, 487,		903, 1059, 1075,
				489, 491, 493,		1126, 1127,
				495, 497, 499,		1209, 1213,
				501, 503, 505,		1215, 1218,
<code>\paperwidth</code>	168, 1244,			507, 510, 513,		1222, 1244,
	1246, 1247,			515, 518, 520,		1248, 1250,
	1251, 1261, 1291			522, 524, 526,		1251, 1253,
<code>\par</code>	1060, 1064, 1066,			528, 530, 707,		1254, 1255,
	1068, 1071,			713, 727, 734,		1258, 1260,
	1073, 1089,			749, 756, 769,		1261, 1278,
	1095, 1098,			774, 789, 798,		1291, 1299,
	1100, 1105,			809, 814, 856, 1980		1303, 1321, 1325
	1108, 1110,	<code>\providecommand</code> . . .			<code>\renewcaptionname</code> .	
	1117, 1161,			. . . 89, 102, 243,	 820, 821,
	1199, 1200,			244, 246, 247,		824, 825, 828,
	1202, 1204,			260, 261, 281,		829, 832, 833,
	1224, 1229,			295, 296, 339,		836, 837, 840,
	1230, 1232,			344, 349, 382,		841, 844, 845,
	1234, 1236,			383, 384, 385,		848, 849, 859,
	1237, 1257,			386, 387, 388,		860, 864, 865,
	1262, 1265,			389, 390, 391,		867, 871, 872,
	1267, 1269,			392, 393, 394,		874, 878, 879,
	1271, 1285,			395, 396, 397,		881, 885, 886,
	1288, 1311,			398, 399, 400,		888, 892, 893,
	1318, 1356,			401, 402, 403,		895, 1786, 1787,
	1359, 1361,			404, 405, 406,		1788, 1789, 1980
	1363, 1366,			407, 408, 412,	<code>\renewcommand</code> ..	90,
	1369, 1374,			666, 670, 674,		92, 143, 154,
	1377, 1379,			702, 721, 743,		155, 156, 157,
	1419, 1437,			765, 781, 1044,		158, 159, 160,
	1505, 1537, 1552			1388, 1389,		161, 291, 336,
<code>\parbox</code>	1015, 1217, 1223			1399, 1400,		341, 346, 351,
<code>\parfillskip</code> ..	1053,			1479, 1480, 1584		900, 905, 907,
	1416, 1432, 1453	<code>\ps@empty</code>		1013		966, 1002, 1007,
<code>\parindent</code>		<code>\ps@maintitle</code>		1012		1023, 1026,
		<code>\put</code>	1243, 1246, 1247,			1028, 1035,
			1250, 1253,			1040, 1045,
<code>\parskip</code>	1051, 1414, 1430		1254, 1303,			1412, 1428,
<code>\pkg</code>	1871, 1883		1306, 1325, 1328			1451, 1491,
<code>\preamble</code>	14					

	1500,	1511,	1153,	1156,	1679,	1681,
	1524,	1529,	1160,	1170,	1683,	1684,
	1543,	1548,	1171,	1175,	1692,	1696,
\renewenvironment .	115		1176,	1178,	1698,	1701,
\RequirePackage ...			1179,	1199,	1702,	1703,
.....	80, 942, 989		1200,	1202,	1704,	1708,
\rlap	907		1204,	1229,	1712,	1715,
\rule	1117, 1213		1232,	1234,	1722,	1727,
			1237,	1317,	1728,	1729,
			1334,	1339,	1730,	1731,
			1340,	1341,	1733,	1734,
			1345,	1505, 1536	1735,	1736,
\scr@ifundefinedorrelax 100,		\strutbox	1209, 1222,	1737,	1738,
	101, 169, 170,			1317, 1331,	1739,	1746,
	174, 206, 207,			1334, 1351, 1355	1747,	1751,
	299, 302, 330,		\studentresearchname		1760,	1761,
	819, 823, 827,			. 266, 385, 420, 478	1764,	1765,
	831, 835, 839,		\subject@font		1774,	1775,
	843, 847, 858,			339, 1066, 1095,	1776,	1777,
	863, 870, 877,			1198, 1228, 1361	1778,	1779,
	884, 891, 941,				1791,	1792,
	944, 988, 991, 1025				1793,	1794,
\scshape	1026				1795,	1796,
\selectfont ...	1054,				1797,	1798,
	1131, 1133, 1135				1799,	1800,
\setcounter .	85, 87, 136				1801,	1802,
\setkomafont					1809,	1813,
	.. 1585, 1669, 1670				1815,	1816,
\setlength ...	1051,				1817,	1818,
	1052, 1053,				1819,	1820,
	1120, 1241,				1821,	1823,
	1414, 1415,				1828,	1833, 1839
	1416, 1430,				\textheight	
	1431, 1432, 1453					193, 1126, 1209,
\setmainfont	1567					1213, 1215, 1217
\setsansfont	1568				\textit	1869
\sffamily	967, 1040,				\textsf	1875
	1128, 1167,				\texttt	1615,
	1584, 1585,					1638, 1641,
	1587, 1669,					1645, 1647,
	1670, 1674, 1808					1648, 1655,
\small	902					1675, 1680,
\space	73,					1682, 1683,
	182, 311, 324,					1692, 1698,
	725, 732, 739, 1461					1705, 1709,
\stepcounter	140					1712, 1727, 1877
\string	181,				\textwidth	
	183, 311, 324, 932					192, 668, 1087,
\strut	324,					1218, 1417, 1421
	325, 767, 772,				\thanks	904
	777, 1132, 1134,				\the	181,
	1136, 1137,					183, 361, 1194,
	1139, 1140,					1278, 1439, 1519
	1144, 1147,				\thefootnote	905
	1148, 1149,					

<code>\thispagestyle</code>	1218, 1299, 1283, 1284, 1369
.	123, 137, 1208
<code>\tiny</code>	1292
Title options:	
academicgrade	285
advisor	287
author	250
blackborder	663
chair	258
company	254
course	253
date	251
dedication	295
discipline	284
duration	252
extratitle	1478
faculty	257
final	664
homepage	246
lowertitleback	1387
mainlogo	292
matriculationnumber	286
oralexaminationdate	294
pagenumber	85
pagestyle	89
place	289
professor	259
publisher	290
referee	288
rulecolor	665
rulesep	665
rulewidth	665
secondlogo	293
sience	283
student	282
subject	260
subjectfont	339
subtitle	255
subtitlefont	349
title	249
titlefont	344
titlehead	243
titlepagefont	330
university	256
uppertitleback	1387
<code>\title@font</code>	344
<code>\title@rulecolor</code>	665, 1210, 1211, 1300, 1301, 1322, 1323
<code>\title@rulesep</code>	665, 1215,
.	1218, 1299, 1303, 1321, 1325
<code>\title@rulewidth</code>	665, 1214,
.	1218, 1298, 1304, 1307, 1320, 1326, 1329
<code>\titlebox</code>	164
<code>\titlefont</code>	344, 346, 1034, 1035, 1064, 1098, 1200, 1232, 1311, 1318, 1340, 1359
<code>\titlepage</code>	100
titlepage (env.)	23, 100
<code>\topmargin</code>	199
<code>\topskip</code>	200
<code>\totalheight</code>	1222
<code>\tp@dokeys</code>	220, 262
<code>\tp@replacewarning</code>	220
<code>\tp@undefinedtitle</code>	103, 155, 156, 157, 158, 159, 160
<code>\twocolumn</code>	139
U	
<code>\unitlength</code>	1241
<code>\unskip</code>	1132, 1134, 1136, 1137, 1139, 1140, 1144, 1147, 1148, 1149, 1153, 1156, 1317, 1334, 1339, 1340, 1341, 1345
<code>\url</code>	1910, 1913
<code>\usebox</code>	215
<code>\usefont</code>	1002
<code>\usepackage</code>	1562, 1563, 1566, 1571, 1572, 1573, 1574, 1576, 1577, 1578, 1580, 1850, 1851, 1852, 1853, 1854, 1855
User commands:	
<code>\academicgrade</code>	285
<code>\advisor</code>	287
<code>\advisorname</code>	382, 1080, 1153,
.	1283, 1284, 1369
<code>\author</code>	250, 1884
<code>\bachelorthesisname</code>	270, 382
<code>\chair</code>	258
<code>\chairmanname</code>	382, 1466, 1788, 1789
<code>\company</code>	254
<code>\course</code>	253
<code>\date</code>	251, 1885
<code>\dedication</code>	295
<code>\DefineReplaceTitleKey</code>	220, 282
<code>\DefineSimpleTitleKey</code>	220, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 283, 284, 285, 286, 287, 288, 289, 290, 292, 293, 294
<code>\degreethesisname</code>	268, 382
<code>\diplomathesisname</code>	267, 382
<code>\discipline</code>	284
<code>\duration</code>	252
<code>\englishordinal</code>	409, 432, 533, 570
<code>\englishordinalfemalerefereename</code>	400, 452, 535
<code>\englishordinalmalerefereename</code>	399, 449, 532
<code>\exittitle</code>	103, 150, 161
<code>\extratitle</code>	1478
<code>\faculty</code>	257
<code>\femaleordinal</code>	382
<code>\femalerefereename</code>	382
<code>\fromname</code>	382, 808, 1070, 1175, 1267
<code>\fromplacename</code>	382, 1178, 1193
<code>\fullsizetitle</code>	164
<code>\germanfemaleordinal</code>	490, 589
<code>\germanmaleordinal</code>	492, 589
<code>\germanordinal</code>	488, 589

<code>\germanordinalfemalecorrectorname</code>	1743, 1757,
..... 567, 868,	.. 382, 1445, 1469
875, 882, 889, 896	1771, 1785, 1806
<code>\germanordinalfemalecorrectorname</code>	<code>\ordinal</code>
<code>\germanordinalfemalecorrectorname</code>	<code>\titlepagestyle</code>
..... 512, 551 89, 123, 137
<code>\germanordinalfemalecorrectorname</code>	<code>\ordinalfemalecorrectorname</code>
..... 382, 853	<code>\university</code> 256, 911
<code>\germanordinalmalecorrectorname</code>	<code>\uppertitleback</code> 1387
. 554, 568, 866,	<code>\ordinalmalereferencename</code>
873, 880, 887, 894 382, 853
<code>\germanordinalmalereferencename</code> 23, 315,
..... 509, 538	<code>\space</code> . 289, 923, 932
<code>\homepage</code> .. 246, 974	704, 705, 710,
<code>\ifstr</code> . 264, 265,	<code>\presentationinformationDHBW</code> 711, 716, 717,
266, 267, 268, 700, 1068
269, 270, 281,	<code>\presentationinformationKIT</code> 723, 724, 725,
1372, 1379, 1460 700, 1271
<code>\indatename</code> 382, 1379	<code>\presentationinformationTUHH</code> 730, 731, 732,
<code>\inittitle</code> 700, 1173
. 103, 146, 154, 900	<code>\presentationinformationUKoLA</code> 745, 747, 752,
<code>\inittilestyle</code> 700
..... 114, 358	<code>\presentationinformationWWUM</code> 766, 771, 776,
<code>\KITlongname</code> 700, 1189
... 808, 916, 1738	<code>\presentedbyname</code>
<code>\KITurl</code> 808, 974, 1739 382, 853,
<code>\lowertitleback</code> 1387	1144, 1191, 1365
<code>\mainlogo</code>	802, 803, 804,
..... 292, 945, 992	805, 1064, 1066,
<code>\makemaintitle</code> .	1071, 1077,
103, 148, 157, 1045	<code>\professor</code>
<code>\makemaintitleback</code>	259
103, 148, 158, 1411	<code>\projectpapername</code>
<code>\makeposttitle</code> 264, 382
103, 149, 159, 1547	<code>\publisher</code> 290, 1044
<code>\makeposttitleback</code>	1078, 1079,
103, 149, 160, 1547	1080, 1081,
<code>\makepretitle</code> ..	<code>\publishers</code> ... 1044
103, 147, 155, 1490	<code>\referee</code>
<code>\makepretitleback</code>	288
..... 103,	<code>\refereename</code> ...
147, 156, 1490,	382, 808, 1081,
1524, 1529, 1543	1274, 1282, 1439
<code>\maketitle</code>	<code>\secondlogo</code> 293
..... 2	<code>\seminarpapername</code>
<code>\maleordinal</code> ... 382 265, 382
<code>\malereferencename</code> 382	<code>\sience</code>
<code>\masterthesisname</code>	283
..... 269, 382	<code>\studentreserchname</code>
<code>\matriculationnumber</code> 382
..... 286	<code>\subject</code>
<code>\NowButAfterBeginDocument</code> 260
..... 23, 373, 854	<code>\subtitle</code>
<code>\ofthename</code>	255
.. 382, 1080, 1081	<code>\thename</code> . 382, 1160
<code>\oralexaminationdate</code>	<code>\title</code> ... 249, 1883
..... 294 243, 961, 999
	<code>\titlehead</code>
 243, 961, 999
	<code>\TitleOption</code> .. 2, 80
	<code>\TitleOptions</code> ..
 2, 80, 116,
	145, 166, 364, 1632
	<code>\value</code> 125, 126, 131, 136
	<code>\vbox</code>
	213
	<code>\vfill</code> .. 1063, 1065,
	1067, 1069,
	1072, 1074,
	1091, 1114,
	1138, 1141,
	1188, 1190,
	1203, 1235,
	1287, 1312,
	1319, 1342,
	1367, 1420, 1551
	<code>\vsize</code>
	189, 193, 1059, 1514
	<code>\vskip</code>
	199,
	200, 214, 1096,
	1099, 1101,
	1107, 1109,
	1111, 1114,

V

1130,	1151,	1172,	1174,	Y
1158,	1199,	1177,	1180,	\year 1194, 1519
1202,	1225,	1186,	1357,	
1229,	1231,	1360,	1362,	Z
1234,	1258,	1364,	1378,	\z@ 213,
1264,	1266,	1433, 1454, 1514		671, 1051, 1052,
1268,	1270,	\vss 216		1053, 1109,
1272,	1290,			1376, 1414,
1443, 1535, 1553				1415, 1416,
				1430, 1431,
\vspace . . 199, 1057,		X		1432, 1435,
1162, 1169,		\xdef 1278, 1283		1453, 1456, 1553

Change History

0.5e		alignment of rule 50
\presentationinformationDHBW:	v0.4b	\makeprettitle: Markus-1:
\if replaced by \ifx 40		publisher page may be omitted 55
v0.1	v0.4c	subject: typing error fixed
General: Start of project 24		(mrpiggi) 30
v0.2	v0.5	\@science: added 31
General: First version using		\chairmannname: added 34
docstrip 24		\femaleordinal: added 34
new style DHBW 38		\femalerefereename: added 34
new style Spacer 38		\fromname:
v0.2a		\NowButAfterBeginDocument
\makemainttitle: Markus-2:		not needed any more 42
\leavevmode added before		provide several English and
\subject@font to avoid line		German languages 42
break after \subject@font		\KITlongname:
using package color or xcolor . 47		\NowButAfterBeginDocument
\makeprettitle: Markus-1: Usage		not needed any more 42
of \@titlepagefont fixed . . . 55		provide several English and
v0.3		German languages 42
General: new style KIT 38		\maleordinal: added 34
\@homepage: added 29		\malerefereename: added 34
\homepage: added 29		\presentationinformationDHBW:
homepage: added 29		\NowButAfterBeginDocument
v0.4		not needed any more 40
General: new style JT-Aufsaetze 38		provide several English and
new style JT-Geschichte 38		German languages 40
new style JT-Typography 38		\presentationinformationKIT:
\@mainlogo: added 31		\NowButAfterBeginDocument
\@usetitleelement@error: added 32		not needed any more 40
\mainlogo: added 31		provide several English and
mainlogo: added 31		German languages 40
\usetitleelement: added 32		\presentationinformationTUHH:
v0.4a		\NowButAfterBeginDocument
\makemainttitle: fix influence of		
height of titlehead to vertical		

not needed any more	40	<code>\refereename</code> : not needed	
provide several English and German languages	40	<code>\AtBeginDocument</code> removed . .	34
<code>\presentationinformationWWUM</code> : new style WWUM	40	<code>\seminarpapername</code> : not needed	
<code>\presentedbyname</code> : changed value for WWUM	43	<code>\AtBeginDocument</code> removed . .	34
<code>\refereename</code> : <code>\NowButAfterBeginDocument</code> not needed any more	42	<code>\studentreserchname</code> : not needed	
provide several English and German languages	42	<code>\AtBeginDocument</code> removed . .	34
<code>\science</code> : added	31	<code>\thename</code> : not needed	
<code>science</code> : added	31	<code>\AtBeginDocument</code> removed . .	34
v0.5a		v0.5e	
<code>\presentedbyname</code> : fixed swissgerman instead of swiss	43	<code>\makemaintitleback</code> : <code>\ifstr</code> in scrbase renamed to <code>\Ifstr</code> . .	54
v0.5b		<code>subject</code> : <code>\ifstr</code> in scrbase renamed to <code>\Ifstr</code>	30
<code>\presentedbyname</code> : changes have to be delayed	43	v0.5f	
v0.5c		General: autodetect several logo picture files	46
<code>\advisorname</code> : not needed		usage of <code>l3build</code>	1
<code>\AtBeginDocument</code> removed . .	34	v0.6	
<code>\bachelorthesisname</code> : not needed		General: package renamed from gobble-	
<code>\AtBeginDocument</code> removed . .	34	https://www.ctan.org/pkg/titlepagetitlepage into	
<code>\chairmannname</code> : not needed		gobblehttps://www.ctan.org/pkg/uni- <code>titlepageuni-titlepage</code>	1
<code>\AtBeginDocument</code> removed . .	34	<code>\@academicgrade</code> : renamed “degree” to “academic grade” to avoid name clash with the degree symbol	31
<code>\degreethesisname</code> : not needed		<code>\academicgrade</code> : renamed “degree” to “academic grade” to avoid name clash with the degree symbol	31
<code>\AtBeginDocument</code> removed . .	34	<code>academicgrade</code> : renamed “degree” to “academic grade” to avoid name clash with the degree symbol	31
<code>\diplomathesisname</code> : not needed		v0.7	
<code>\AtBeginDocument</code> removed . .	34	General: don’t use <code>inputenc</code> any longer	57
<code>\femaleordinal</code> : not needed		new style UKoLa	22
<code>\AtBeginDocument</code> removed . .	34	<code>\@secondlogo</code> : added	31
<code>\femalerefereename</code> : not needed		<code>\englishordinalfemalerefereename</code> : added	36
<code>\AtBeginDocument</code> removed . .	34	<code>\englishordinalmalerefereename</code> : added	36
<code>\fromname</code> : not needed		<code>\germanordinalfemalecorrectorname</code> : added	37
<code>\AtBeginDocument</code> removed . .	34	<code>\germanordinalfemalerefereename</code> : added	37
<code>\fromplacename</code> : not needed		<code>\germanordinalmalecorrectorname</code> : added	37
<code>\AtBeginDocument</code> removed . .	34	<code>\germanordinalmalerefereename</code> : added	37
<code>\malerefereename</code> : not needed		<code>\indatename</code> : added	34
<code>\AtBeginDocument</code> removed . .	34		
<code>\masterthesisname</code> : not needed			
<code>\AtBeginDocument</code> removed . .	34		
<code>\ofthename</code> : not needed			
<code>\AtBeginDocument</code> removed . .	34		
<code>\oralexaminationdataname</code> : not needed <code>\AtBeginDocument</code> removed	34		
<code>\ordinal</code> : not needed			
<code>\AtBeginDocument</code> removed . .	34		
<code>\presentedbyname</code> : not needed			
<code>\AtBeginDocument</code> removed . .	34		
<code>\projectpapername</code> : not needed			
<code>\AtBeginDocument</code> removed . .	34		

<code>\ordinalfemalerefereename:</code>		<code>using tu encoding</code>	57
added	34	<code>using class <code>ltxdoc</code> instead of</code>	
changed value for UKoLa	43	<code>scrdoc</code>	62
<code>\ordinalmalerefereename:</code> added	34	<code>\makemaintitle: JT-Aufsaetze</code>	
changed value for UKoLa	43	allows empty author	47
<code>\presentationinformationUKoLA:</code>		<code>\presentationinformationDHBW:</code>	
added	40	using	
<code>\presentedbyname:</code> changed value		<code>\usenonemptytitleelement</code> . .	40
also for UKoLa	43	<code>\presentationinformationTUHH:</code>	
<code>\secondlogo:</code> added	31	using	
<code>secondlogo:</code> added	31	<code>\usenonemptytitleelement</code> . .	40
v0.7a		<code>\presentationinformationUKoLA:</code>	
<code>\ordinalfemalerefereename:</code>		using	
typofix for austrian	43	<code>\usenonemptytitleelement</code> . .	40
<code>\ordinalmalerefereename:</code> typofix		<code>\presentationinformationWWUM:</code>	
for austrian	43	using	
v0.7b		<code>\usenonemptytitleelement</code> . .	40
<code>\germanordinalmalecorrectorname:</code>		<code>\usenonemptytitleelement:</code>	
missing <code>\fi</code> added	37	added	32
<code>\germanordinalmalerefereename:</code>		v1.1	
missing <code>\fi</code> added	37	<code>rulecolor:</code> new	39
v0.7c		<code>\title@rulecolor:</code> new	39
<code>\germanordinalmalerefereename:</code>		v1.1a	
orphan empty line removed . .	37	<code>\makemaintitleback:</code> resetting	
v1.0		paragraph skip, indent and	
General: prepared for engines		fillskip	54